



MOX-Report No. 23/2016

**A Patient-Specific Aortic Valve Model based on Moving  
Resistive Immersed Implicit Surfaces**

Fedele, M.; Faggiano, E.; Dedè, L.; Quarteroni, A.

MOX, Dipartimento di Matematica  
Politecnico di Milano, Via Bonardi 9 - 20133 Milano (Italy)

[mox-dmat@polimi.it](mailto:mox-dmat@polimi.it)

<http://mox.polimi.it>

# A Patient-Specific Aortic Valve Model based on Moving Resistive Immersed Implicit Surfaces

Marco Fedele<sup>1,\*</sup>    Elena Faggiano<sup>1,\*</sup>    Luca Dedè<sup>1</sup>  
Alfio Quarteroni<sup>1,2(*onleave*)</sup>

June 7, 2016

<sup>1</sup>CMCS – Chair of Modelling and Scientific Computing  
MATHICSE – Mathematics Institute of Computational Science and Engineering  
EPFL – École Polytechnique Fédérale de Lausanne  
Station 8, 1015 Lausanne, Switzerland

<sup>2</sup> MOX – Modellistica e Calcolo Scientifico  
Dipartimento di Matematica “F. Brioschi”  
Politecnico di Milano  
via Bonardi 9, 20133 Milano, Italy

*\*Present address: Computational Mechanics & Advanced Materials Group  
Dipartimento di Ingegneria Civile e Architettura  
Università di Pavia  
Via Ferrata, 3, 27100 Pavia, Italy*

`elena.faggiano@unipv.it`

**Keywords:** aortic valve image-based modeling patient-specific simulation computational fluid dynamics finite element method heart modeling

## Abstract

In this paper, we propose a full computational pipeline to simulate the hemodynamics in the aorta including the valve. Closed and open valve surfaces, as well as the lumen aorta, are reconstructed directly from medical images using new ad hoc algorithms, allowing a patient-specific simulation. The fluid dynamics problem that accounts from the movement of the valve is solved by a new 3D-0D fluid-structure interaction model in which the valve surface is implicitly represented through level set functions, yielding, in the Navier-Stokes equations, a resistive penalization term enforcing the blood to adhere to the valve leaflets. The dynamics of the valve between its closed and open position is modeled using a reduced geometric 0D model. At the discrete level, a Finite Element formulation is used and the SUPG stabilization is extended to include the resistive term in the Navier-Stokes equations. Then, after time discretization, the 3D fluid and 0D valve models

are coupled through a staggered approach. This computational pipeline, applied to a patient specific geometry and data, can reliably reproduce the movement of the valve, the sharp pressure jump occurring across the leaflets, and the blood flow pattern inside the aorta.

## 1 Introduction

In the context of computational fluid dynamics for the cardiovascular system (see e.g. (Quarteroni, 2015; Formaggia et al, 2010; Peskin, 2002)) patient-specific simulations have become increasingly important (Caballero and Laín, 2013; Taylor and Steinman, 2010): indeed, they can be used together with classical imaging methods to perform diagnosis, to provide more insights in the study of the evolution of pathologies, or to help in surgical procedure planning, e.g. to virtually create alternative treatment strategies for a given patient.

In the whole cardiovascular system, the proximal aorta together with the aortic valve is likely the most investigated environment (Caballero and Laín, 2013; Chandran and Vigmstad, 2013; Faggiano et al, 2013a; Conti et al, 2010a; Pasta et al, 2013; Marom et al, 2013; Tse et al, 2011; Rinaudo and Pasta, 2014; Wendell et al, 2013). The aorta is the main artery of the human body supplying oxygenated blood and nutrients to all the components of the body. It originates from the left ventricle of the heart and extends down to the abdomen. In its first tract, it comprises the aortic root and the ascending aorta. The aortic root includes: (a) three enlargements, the so called sinuses of Valsalva, classified as left-coronary, right-coronary and non-coronary sinuses, (b) the fibrous aortic annulus connecting the valve leaflets, the sinuses, and the ventricle, and (c) the sinotubular junction (STJ) representing the region where the normal tubular configuration of the aorta is attained. The left ventricle and the aortic root are separated by the aortic valve which features three thin and flexible leaflets shaped as curved triangles and attached to the fibrous aortic annulus, forming with the latter a parabolic profile (Charitos and Sievers, 2013). The efficient opening and closing of the aortic valve during the cardiac cycle guarantees the appropriate circulation of blood flow from the left ventricle to the ascending aorta, thus preventing regurgitation phenomena.

Other than focusing on the valve in physiological conditions, different studies were conducted to understand aortic pathologies; in this respect, we recall computational studies of aortic diseases due to bicuspid aortic valve (Chandran and Vigmstad, 2013; Faggiano et al, 2013a; Vergara et al, 2012; Conti et al, 2010a; Pasta et al, 2013; Marom et al, 2013; Bonomi et al, 2015), computational investigations of valve prosthesis (Morganti et al, 2014; Auricchio et al, 2014, 2011; De Hart et al, 2003a; Nestola et al, 2016), and aortic aneurysms or dissection studies (Tse et al, 2011; Rinaudo and Pasta, 2014). Among these, some studies aim at understanding the valve mechanics with a particular interest for stresses internal to the valve leaflets and the aortic root (Morganti et al, 2014; Auricchio et al, 2014, 2011; De Hart et al, 2003a; Marom et al, 2013; Conti et al,

2010b), while other studies focus on the fluid dynamics in the aorta investigating possible abnormalities through appropriate indicators (Chandran and Vigmostad, 2013; Faggiano et al, 2013a; Vergara et al, 2012; Conti et al, 2010a; Pasta et al, 2013; Tse et al, 2011; Rinaudo and Pasta, 2014; Bonomi et al, 2015; Nestola et al, 2016). In this work, we introduce a numerical method able to capture the features of the blood flow through the first tract of the aorta. Since the flow field strongly depends on the aortic valve function, the latter should be necessarily included in our model. Indeed, the valve regulates the blood flow and plays an important role in both physiological and pathological scenarios.

Our model for the valve characterization involves a three-dimensional (3D) fluid-structure interaction (FSI) model accounting for the coupling between valve dynamics and blood flow. Computational methods for FSI simulations of aortic valve dynamics can be tentatively grouped into four categories: the approaches based on the so called Arbitrary Lagrangian Eulerian (ALE) formulation (Chandra et al, 2012; Cheng et al, 2004; Marom et al, 2013), those based on the Immersed Boundary (IB) methods (Peskin, 1972; McQueen and Peskin, 2000; Griffith, 2012), those based on Fictitious Domain (FD) formulations (van Loon et al, 2006; De Hart et al, 2004, 2003b,a), and those based on hybrid formulations (Ge and Sotiropoulos, 2007; Borazjani et al, 2010; Ge and Sotiropoulos, 2010; Le and Sotiropoulos, 2013; Kamensky et al, 2015). All of them require a spatial discretization of the problem over a computational mesh. In the ALE formulation, the computational mesh is deformed to follow the boundaries of the fluid domain, in this case the aortic valve leaflets; however, this approach requires frequent remeshing of the domain to deal with large mesh deformation and involves topology changes when the valve opens and closes. In both IB and FD methods the fluid is instead discretized in a fixed computational domain, while the valve structure is discretized in a separate body-fitted mesh with the coupling accounted either explicitly or implicitly by adding suitable forces at the fluid/solid interface. In particular, for the IB method, the appropriate forces are explicitly added to the fluid equation and distributed over all nodes of the fluid mesh through a smoothed Dirac delta function (Peskin, 1972, 2002). An evolution of the original method, in which the mesh is adaptively refined in the proximity of the immersed boundaries, was applied to aortic valve simulations in Griffith (2012). In the FD method the coupling between the fluid and the solid problem is made through Lagrange multipliers (van Loon et al, 2006); the method had been applied to simulate a trileaflet aortic valve at non-physiological Reynolds numbers ( $Re = 900$ ) and with symmetry assumption on the geometry (De Hart et al, 2004, 2003b,a; Morsi et al, 2007). Finally, among the hybrid formulations, we recall the Curvilinear Immersed Boundary (CURVIB) method developed by Ge and Sotiropoulos (2007) which integrates structured curvilinear boundary fitted grids with an IB method. The CURVIB method had been applied to study trileaflet and bileaflet aortic valves with physiologic, pulsating flows, even if not in realistic aortas (Le and Sotiropoulos, 2013; Ge and Sotiropoulos, 2010; Borazjani, 2013). Borazjani et al (2010) tested the method

in a patient-specific anatomic aorta, even if only a simple mechanical bileaflet valve has been simulated. Another recent method is the ALE/IB Immersogeometric method proposed by Kamensky et al (2015) and Hsu et al (2014) which combines a variational IB method and the traditional ALE technique. The authors applied the method to a simplified aortic root geometry and valve leaflets demonstrating promising abilities of the proposed strategy (Hsu et al, 2014).

A major challenge in trileaflet aortic valve FSI simulations is to capture the coaptation between the leaflets of the valve during the closing phase. Most of the previous methods have circumvented this problem by allowing the valve to remain partially open (Kamensky et al, 2015; De Hart et al, 2003b; Borazjani, 2013). Astorino et al (2009) introduced an algorithm for calculating self-contacts of thin structures inside a fluid domain using the FD formulation, which they applied to aortic valve simulations, even if only for small values of diastolic transvalvular pressure, specifically about  $0.1 \text{ mmHg}$ . Marom et al (2012) have carried out 3D FSI simulations for an aortic valve with leaflet coaptation, by coupling a Finite Element (FE) commercial code for the mechanics of the leaflets with a commercial finite volume flow solver; however, only the final stages of the valve closure in a simplified geometry has been successfully simulated.

Several challenges arise when using full 3D FSI models. They regard high computational costs, handling of large displacements of the valve leaflets in the aortic root, contact among the leaflets, and high pressure jumps across a closed or nearly closed valve. At the numerical level, highly accurate, stable, and robust spatial and time discretization schemes must be used. For these reasons, full 3D FSI models are nowadays mostly restricted to study valves in simplified configurations possibly with simplified flow assumptions or only with a simpler bileaflet mechanical valve. Indeed, to the best of our knowledge, a 3D FSI simulation with trileaflet aortic valve and patient-specific aortic and valve geometry has not been successfully pursued yet.

Concerning the patient-specific studies of the fluid dynamics in the ascending aorta reported in literature, a full model of the valve is not even considered when the focus is on valves pathologies (Faggiano et al, 2013a; Vergara et al, 2012; Della Corte et al, 2012; Pasta et al, 2013; Tse et al, 2011; Rinaudo and Pasta, 2014; Bonomi et al, 2015; Nestola et al, 2016). Indeed, the valve is either completely neglected (Tse et al, 2011; Nestola et al, 2016), or included as an orifice at the inlet surface without the need of providing its detailed geometry (Faggiano et al, 2013a; Vergara et al, 2012; Wendell et al, 2013), or embedded as a set of fixed surfaces inside the aortic domain (Della Corte et al, 2012; Pasta et al, 2013; Rinaudo and Pasta, 2014; Bonomi et al, 2015). In all these cases, the adopted model describes only the open and closed states of the valve without accounting for the intermediate positions between these two configurations. Nevertheless, most of the above mentioned papers highlight the importance of the inclusion of the valve in the model in terms of patient-specific valve orifice or in terms of patient-specific valve leaflets. In particular, Faggiano et al (2013a), Vergara et al (2012) and Wendell et al (2013) showed that the inclusion of the

shape of the valve orifice determines the correct flow pattern in the vessel, highlighting also the influence of the area of the orifice. Della Corte et al (2012) stressed the importance to include the leaflets surfaces in the fluid simulations, reporting that cusp opening restrictions or asymmetries cause a modification to the physiological flow direction. A recent work of Bonomi et al (2015) highlights how important the inclusion of fixed leaflets in the model is for the generation of specific helical flow patterns which otherwise could not have been fully reproduced.

Based on the above considerations, we aim at providing a computational method to study and numerically simulate the fluid dynamics in the aorta including the valve leaflets and the aortic valve orifice for the whole cardiac cycle by means of a reduced FSI model for the characterization of the interaction between the blood flow and the valve leaflets. Specifically, we propose a new method for the representation of the valve leaflets, which we name Resistive Immersed Implicit Surface (RIIS) method. Indeed, our approach is based on the Resistive Immersed Surface (RIS) approach, originally proposed in Fernández et al (2008) to study a porous interface immersed in a fluid and lately used in Astorino et al (2012) to model the aortic valve. However, in the original RIS approach, the mechanics of the leaflets is neglected and the valve is replaced by two immersed surfaces fixed in space describing the open and the closed valve, respectively. The presence of two valve surfaces is taken into account in the momentum equation of the Navier-Stokes equations by adding a penalization term, specifically a resistive term, which weakly enforces the blood to adhere to the leaflets. In our approach, we extend the model of Fernández et al (2008) representing the valve surfaces implicitly through a level set formulation for the leaflets. In this way, the immersed surfaces are described analytically, thus avoiding the need of discretizing them by a computational mesh. Moreover, we use our RIIS method in a 3D-0D FSI reduced model for the interactions between the fluid and the valve leaflets. We model the dynamics of the valve between its closed and open position using a 0D model proposed by Korakianitis and Shi (2006) based on a second order ordinary differential equation (ODE) with the leaflets angle as the unique, dependent variable. In particular, the configuration of the valve leaflets at each time instant depends on the flow rate and the pressure field in the aorta and in the left ventricle as forcing terms of the 0D valve model. This is achieved through a reduced fully coupled 3D-0D FSI model where the Navier-Stokes equations for the blood flow are coupled to the ODE representing the valve dynamics. The leaflets position affects the momentum equation of the Navier-Stokes equations by means of the resistive term, for which the valve is described with implicit level set functions (RIIS); on the other side, the ODE describing the dynamics of the valve receives as input the pressure jump across the valve and the flow rate. Our reduced 3D-0D FSI model provides the motion of the orifice and of the leaflets position at a limited computational cost with respect to a full 3D FSI solver. Indeed, our model is solved in an Eulerian formulation and in a fixed computational domain. A similar resistive Eulerian surfaces

framework was firstly proposed by Laadhari and Quarteroni (2016). However, in our work we propose a significantly different algorithm to couple the 3D fluid and 0D valve models which allows to obtain realistic physiological results. For the numerical approximation of the Navier-Stokes equations with the RIIS formulation, we consider the FE method for which the approximate velocity and pressure variables are built from Lagrangian polynomial basis functions of the same degree. In order to obtain a stable formulation and to control numerical instabilities associated to the highly advective blood flow regime through the valve, we consider and extend for the first time the SUPG stabilization (Bazilevs et al, 2007; Forti and Dedè, 2015) to the Navier-Stokes equations with RIIS in the framework of the variational multiscale method (VMS). Finally, in order to deal with patient-specific cases, we develop a full computational pipeline starting from medical images and ending with the numerical simulation results. In particular, we propose a technique to segment both the aorta and the leaflets from Computed Tomography images. The result of the segmentation of the aorta is then transformed into a computational mesh, while we propose a new interpolation strategy which allows to transform a point cloud description of the patient-specific leaflets in an implicit level set function to be used in the RIIS formulation. To summarize, in this work we first propose a new method for the computational fluid dynamics in the aorta with the inclusion of the movement of the valve leaflets and then we propose a computational pipeline that allows performing such simulations in a patient-specific setting, for both aorta and aortic valve leaflets.

The outline of the paper is as follows: in Section 2 the reduced 3D-0D FSI model for the aortic valve is mathematically described, while in Section 3 its numerical approximation is afforded; the generation of the aortic domain and the patient-specific leaflets is presented in Section 4. In Section 5, the whole pipeline is applied to a patient-specific dataset and numerical results on valve movement, pressure and velocity fields are reported; conclusions follow in Section 6.

## 2 Mathematical Modeling

In this section, we describe the RIIS model, we adapt it to describe the fluid dynamics of the Aortic Valve (AV-RIIS model), we recall the 0D model based on ODEs proposed by Korakianitis and Shi (2006) to compute the aortic valve angle (AV-0D model), and finally we show our approach to couple the AV-0D and the AV-RIIS models into the 3D-0D FSI model for the aortic valve.

### 2.1 The Resistive Immersed Implicit Surface (RIIS) Model

We describe the mathematical model adopted to represent a fluid in a general domain with an immersed surface into it. In particular, first we recall the RIS model (Fernández et al, 2008), then we describe the surface through an implicit function, and finally we present our RIIS model.

Given a fixed domain  $\Omega \subset \mathbb{R}^3$  and an immersed surface  $\Gamma \subset \Omega$ , the RIS model introduced by Fernández et al (2008) consists in enriching the classical Navier-Stokes equations with a penalization term in the conservation momentum equation holding only on the immersed surface  $\Gamma$ . The RIS Eulerian formulation for a generic incompressible homogeneous Newtonian fluid reads: find the velocity  $\mathbf{u}$  and the pressure  $p$  such that, for all  $t \in (0, T)$ :

$$\left\{ \begin{array}{ll} \rho \frac{\partial \mathbf{u}}{\partial t} - 2\mu \nabla \cdot \mathbf{D}(\mathbf{u}) + \rho(\mathbf{u} \cdot \nabla) \mathbf{u} \\ \quad + \nabla p + \delta_\Gamma \mathbf{R}_{\Gamma, \varepsilon}(\mathbf{u} - \mathbf{u}_\Gamma) = \mathbf{f} & \text{in } \Omega \\ \nabla \cdot \mathbf{u} = 0 & \text{in } \Omega \end{array} \right. \quad (1)$$

endowed with suitable initial and boundary conditions. We indicate with  $\rho$  the density of the fluid, with  $\mu$  its dynamic viscosity, and with  $\mathbf{D}(\mathbf{u})$  the strain rate tensor

$$\mathbf{D}(\mathbf{u}) = \frac{\nabla \mathbf{u} + \nabla^T \mathbf{u}}{2}. \quad (2)$$

The corresponding Cauchy stress tensor, in case of Newtonian fluids, reads:

$$\boldsymbol{\sigma}(\mathbf{u}, p) = -p\mathbf{I} + 2\mu\mathbf{D}(\mathbf{u}), \quad (3)$$

where  $\mathbf{I}$  is the identity tensor. The quantities  $\delta_\Gamma$ ,  $\mathbf{R}_{\Gamma, \varepsilon}$  and  $\mathbf{u}_\Gamma$ , all referring to the immersed surface  $\Gamma$ , represent the ‘‘Dirac distribution’’ used to localize  $\Gamma$  in  $\Omega$ , a symmetric and positive second order tensor modeling its resistance, and the velocity of  $\Gamma$ , respectively; at this stage,  $\mathbf{u}_\Gamma$  has to be referred as a data for the fluid problem. For the sake of simplicity, we also assume that the boundary  $\partial\Omega$  of the domain is divided into two nonoverlapping subsets  $\partial\Omega_D$  and  $\partial\Omega_N$  such that  $\partial\Omega = \partial\Omega_D \cup \partial\Omega_N$  where Dirichlet and Neumann boundary conditions are assigned:

$$\begin{array}{ll} \mathbf{u} = \mathbf{g} & \text{on } \partial\Omega_D \times (0, T), \\ \boldsymbol{\sigma}\mathbf{n} = \mathbf{h} & \text{on } \partial\Omega_N \times (0, T), \end{array} \quad (4)$$

respectively, for  $\mathbf{g}$  and  $\mathbf{h}$  given; problem (1) is endowed with the initial condition:

$$\mathbf{u}(\mathbf{x}, 0) = \mathbf{u}_0(\mathbf{x}) \quad \text{in } \Omega, \quad (5)$$

for some initial velocity  $\mathbf{u}_0$ . The symmetric tensor  $\mathbf{R}_{\Gamma, \varepsilon}$  was introduced in Fernández et al (2008) to model fixed porous interfaces (for which  $\mathbf{u}_\Gamma = \mathbf{0}$ ) and in particular medical stent devices. In Astorino et al (2012) the same method is used to model impermeable fixed surfaces (e.g. a fully open and fully closed aortic valve), for which  $\mathbf{R}_\Gamma = R_\Gamma \mathbf{I}$  with the real valued function  $R_\Gamma$  chosen sufficiently large to weakly enforce the fluid velocity  $\mathbf{u}$  to be small or nearly zero in proximity of the surface  $\Gamma$ . In this paper, we generalize the latter case for a moving immersed surface (i.e.  $\mathbf{u}_\Gamma \neq \mathbf{0}$ ). Furthermore, we underline that this method can be interpreted as a weak imposition of a no-slip condition on

the immersed surface  $\Gamma$ , provided that suitable scalings with respect to the discretization parameters are introduced. For this reason, we select  $\mathbf{R}_{\Gamma,\varepsilon} = R_\Gamma/\varepsilon \mathbf{I}$ , with  $\varepsilon > 0$  a suitable length scale that we will later link to the FE mesh size. In this way, we have  $R_\Gamma/\varepsilon \rightarrow \infty$  for  $\varepsilon \rightarrow 0$ , ensuring that  $\mathbf{u}|_\Gamma \rightarrow \mathbf{u}_\Gamma$ .

By defining the Hilbert spaces  $V = \{\mathbf{v} \in [H^1(\Omega)]^3 : \mathbf{v}|_{\partial\Omega_D} = \mathbf{g}\}$ ,  $V_0 = \{\mathbf{v} \in [H^1(\Omega)]^3 : \mathbf{v}|_{\partial\Omega_D} = \mathbf{0}\}$ , and  $Q = L^2(\Omega)$  and by choosing  $\mathbf{v} \in V_0$  and  $q \in Q$  as test functions for velocity and pressure, respectively, we write the weak formulation of problem (1)-(4) as follows: find  $\mathbf{u} \in L^2(\mathbb{R}^+; V) \cap C^0(\mathbb{R}^+; [L^2(\Omega)]^3)$  and  $p \in L^2(\mathbb{R}^+; Q)$  such that, for all  $\mathbf{v} \in V_0$  and  $q \in Q$ :

$$\begin{cases} \left( \rho \frac{\partial \mathbf{u}}{\partial t}, \mathbf{v} \right) + a(\mathbf{u}, \mathbf{v}) \\ + c(\mathbf{u}, \mathbf{u}, \mathbf{v}) + b(\mathbf{v}, p) = F(\mathbf{v}) \\ -b(\mathbf{u}, q) = 0, \end{cases} \quad (6)$$

where we denote with  $(\cdot, \cdot)$  the scalar product in  $L^2(\Omega)$  and we define the following forms and linear functionals:  $a : V \times V \rightarrow \mathbb{R}$ ,  $b : V \times Q \rightarrow \mathbb{R}$ ,  $c : V \times V \times V \rightarrow \mathbb{R}$ ,  $F : V \rightarrow \mathbb{R}$  such that:

$$\begin{aligned} a(\mathbf{u}, \mathbf{v}) &:= \tilde{a}(\mathbf{u}, \mathbf{v}) + a_\Gamma(\mathbf{u}, \mathbf{v}), \\ \tilde{a}(\mathbf{u}, \mathbf{v}) &:= \int_\Omega 2\mu \mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{v}) \, dx, \\ a_\Gamma(\mathbf{u}, \mathbf{v}) &:= \frac{R_\Gamma}{\varepsilon} \int_\Gamma (\mathbf{u} - \mathbf{u}_\Gamma) \cdot \mathbf{v} \, d\gamma, \\ b(\mathbf{v}, p) &:= - \int_\Omega p \nabla \cdot \mathbf{v} \, dx, \\ c(\mathbf{w}, \mathbf{u}, \mathbf{v}) &:= \int_\Omega \rho ((\mathbf{w} \cdot \nabla) \mathbf{u}) \cdot \mathbf{v} \, dx, \\ F(\mathbf{v}) &:= \int_\Omega \mathbf{f} \cdot \mathbf{v} \, dx + \int_{\partial\Omega_N} \mathbf{h} \cdot \mathbf{v} \, d\gamma. \end{aligned} \quad (7)$$

We notice that the form  $a_\Gamma(\mathbf{u}, \mathbf{v})$  is associated to the definition of the ‘‘Dirac distribution’’ in Eq. (1), that is

$$\langle \delta_\Gamma(\mathbf{u} - \mathbf{u}_\Gamma), \mathbf{v} \rangle = \int_\Gamma (\mathbf{u} - \mathbf{u}_\Gamma) \cdot \mathbf{v} \, d\gamma, \quad (8)$$

for all  $\mathbf{v} \in V$ ; the method can be easily generalized to the case of  $N$  immersed surfaces  $\Gamma_i$  by introducing the bilinear form  $a_{\Gamma,N}(\mathbf{u}, \mathbf{v}) = \sum_{i=1}^N R_{\Gamma_i}/\varepsilon_i \int_{\Gamma_i} (\mathbf{u} - \mathbf{u}_{\Gamma_i}) \cdot \mathbf{v} \, d\gamma$ , for some  $\{\varepsilon_i\}_{i=1}^N$ .

Our approach consists in describing the immersed surface  $\Gamma$  as an implicit surface (Osher and Fedkiw, 2001). This is made by exploiting two level set functions  $\varphi, \psi : \Omega \rightarrow \mathbb{R}$  and combining them to implicitly describe the open immersed surface  $\Gamma$  as:

$$\Gamma = \{\mathbf{x} \in \Omega : \varphi(\mathbf{x}) = 0 \text{ and } \psi(\mathbf{x}) \leq 0\}. \quad (9)$$

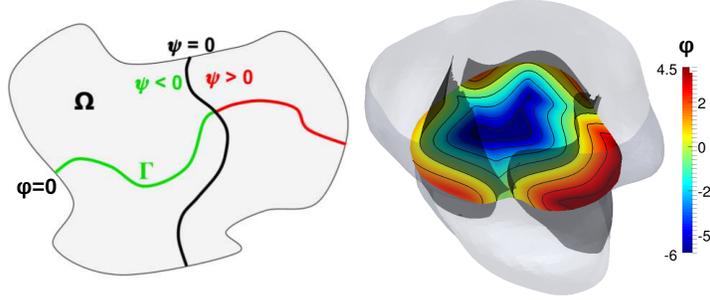


Figure 1: The two level set functions: a 2D schematic example of the description of the immersed surface  $\Gamma$  through the level set functions  $\varphi$  and  $\psi$  (left); the application to the description of the aortic valve, the values of the distance function  $\varphi$  imaged on a slice (right).

A graphical sketch of the idea is shown for a 2D case in Figure 1, left. The use of two level set functions allows to model an open immersed surface. The first level set function  $\varphi$  is used to identify the immersed surface  $\Gamma$  as a part of its zero-level; the auxiliary level set function  $\psi$  is used to cut the zero-level of  $\varphi$  in order to obtain the final open surface  $\Gamma$ . Furthermore, we require that the level set function  $\varphi$  is a signed distance function (for which  $|\nabla\varphi| = 1$ ). In this way, we ensure that the value of the function  $\varphi$  in  $\Omega$  represents the signed distance to the immersed surface  $\Gamma$  (Osher and Fedkiw, 2001). As example, we show in Figure 1, right, the values taken by the distance function  $\varphi$  at a constant level of the coordinate  $z$ , where  $\Omega$  represents the aortic root and  $\Gamma$  is the open aortic valve.

Now, we use the two level set functions  $\varphi$  and  $\psi$  to describe the immersed surface  $\Gamma$  implicitly. First, we define a smooth Dirac function to approximate the “Dirac distribution”  $\delta_\Gamma$  as follows:

$$\delta_\varepsilon(\varphi) = \begin{cases} (1 + \cos \pi\varphi/\varepsilon)/2\varepsilon & \text{if } |\varphi| \leq \varepsilon, \\ 0 & \text{if } |\varphi| > \varepsilon. \end{cases} \quad (10)$$

In this manner, we have  $\int_{-\infty}^{+\infty} \delta_\varepsilon(\varphi) d\varphi \equiv \int_{-\varepsilon}^{+\varepsilon} \delta_\varepsilon(\varphi) d\varphi = 1$ . We observe that the smoothing parameter  $\varepsilon$  is the same length scale of Eqs. (1) and (7) used to weakly enforce the velocity  $\mathbf{u}$  to adhere to  $\mathbf{u}_\Gamma$  on  $\Gamma$  through the resistive approach. We obtain:

$$|\Gamma| = \int_\Omega \delta_\Gamma d\mathbf{x} = \int_\Omega (1 - \mathcal{H}(\psi)) \delta_\varepsilon(\varphi) d\mathbf{x}, \quad (11)$$

where  $\mathcal{H}$  is the Heaviside function:

$$\mathcal{H}(\varphi) = \begin{cases} 1 & \text{if } |\varphi| \geq 0, \\ 0 & \text{if } |\varphi| < 0, \end{cases} \quad (12)$$

with the definition of  $\Gamma$  in Eq. (9) and the fact that  $\varphi$  is a signed distance function. Therefore, we approximate the resistive term  $a_\Gamma(\mathbf{u}, \mathbf{v})$  of Eq. (7) as:

$$\begin{aligned} & \frac{R_\Gamma}{\varepsilon} \int_\Gamma (\mathbf{u} - \mathbf{u}_\Gamma) \cdot d\gamma \\ & \simeq \frac{R_\Gamma}{\varepsilon} \int_\Omega (1 - \mathcal{H}(\psi)) \delta_\varepsilon(\varphi) (\mathbf{u} - \mathbf{u}_\Gamma) \cdot \mathbf{v} \, d\mathbf{x}, \end{aligned} \quad (13)$$

the latter term being an approximation of  $\frac{R_\Gamma}{\varepsilon} \langle \delta_\Gamma(\mathbf{u} - \mathbf{u}_\Gamma), \mathbf{v} \rangle$ . This approximation allows to replace the surface integral on  $\Gamma$  with an integral in the whole domain  $\Omega$ . We remark that such approximation improves for  $\varepsilon \rightarrow 0$ . According to this approach, one can describe a moving immersed surface by suitably defining the level set functions  $\varphi$  and  $\psi$  as dependent on the time variable  $t$  other than the spatial variable  $\mathbf{x}$ . These features can be introduced in virtue of the implicit definition of the immersed surface  $\Gamma$  and, for this reason, we name our approach Resistive Immersed Implicit Surface (RIIS). More explicitly, we redefine the bilinear form  $a(\mathbf{u}, \mathbf{v})$  in Eq. (7) introducing the bilinear form  $a_{RIIS}(\mathbf{u}, \mathbf{v})$  as:

$$\begin{aligned} a(\mathbf{u}, \mathbf{v}) & := \tilde{a}(\mathbf{u}, \mathbf{v}) + a_{RIIS}(\mathbf{u}, \mathbf{v}), \\ a_{RIIS}(\mathbf{u}, \mathbf{v}) & := \\ & := \frac{R_\Gamma}{\varepsilon} \int_\Omega (1 - \mathcal{H}(\psi)) \delta_\varepsilon(\varphi) (\mathbf{u} - \mathbf{u}_\Gamma) \cdot \mathbf{v} \, d\mathbf{x}. \end{aligned} \quad (14)$$

## 2.2 The RIIS Model for the Aortic Valve (AV-RIIS)

We use the RIIS model to describe the blood flow through the aortic valve. For this reason, we identify the domain  $\Omega$  with the anatomical region composed by the final part of the left ventricle, the aortic root, and the ascending aorta. Hence, we split the boundary as:  $\partial\Omega = \partial\Omega_{wall} \cup \partial\Omega_{in} \cup \partial\Omega_{out}$ , where the three subsets of  $\partial\Omega$  represent the lumen surface of the aorta, the inlet boundary in the left ventricle, and the outlet boundary at the upper end of the ascending aorta, respectively. In particular, we assume the inlet  $\partial\Omega_{in}$  and the outlet  $\partial\Omega_{out}$  boundaries as the planar surfaces orthogonal to the centerline of the vessel, with outward normals  $\mathbf{n}_{in}$  and  $\mathbf{n}_{out}$ , respectively. By recalling the notation of Eq. (4)  $\partial\Omega_{wall} = \partial\Omega_D$  and  $\partial\Omega_{in} \cup \partial\Omega_{out} = \partial\Omega_N$ , we assign an homogeneous Dirichlet condition on  $\partial\Omega_{wall}$  for the velocity and Neumann conditions both on the inlet and the outlet boundaries to set the pressure:

$$\begin{aligned} \mathbf{u} & = \mathbf{0} && \text{on } \partial\Omega_{wall} \times (0, T), \\ \boldsymbol{\sigma} \mathbf{n}_{in} & = p_{in} \mathbf{n}_{in} && \text{on } \partial\Omega_{in} \times (0, T), \\ \boldsymbol{\sigma} \mathbf{n}_{out} & = p_{out} \mathbf{n}_{out} && \text{on } \partial\Omega_{out} \times (0, T), \end{aligned} \quad (15)$$

where  $p_{in} = p_{in}(t)$  and  $p_{out} = p_{out}(t)$  are the pressure functions prescribed according to physiological values.

We define the two level set functions  $\varphi$  and  $\psi$  in order to represent the aortic valve at each time  $t \in (0, T)$ . More in detail, through the level set functions  $\varphi_{op}, \varphi_{cl}, \psi_{op}, \psi_{cl} : \Omega \rightarrow \mathbb{R}$ , we represent the valve in the fully open (*op*) and closed (*cl*) configurations; such functions are fixed in  $\Omega$  and independent of time. Indeed, the valve remains in one of these two configurations for almost the whole cardiac cycle, except during its fast opening and closing stages. Moreover, we can reconstruct these two configurations directly from medical images in a patient-specific geometry (as will be outlined in Section 4), while it is basically impossible to recover the level set functions for the intermediate valve configurations (during the opening and closing stages). The configuration of the valve at each time is then obtained by linearly interpolating the open and the closed ones as:

$$\begin{aligned}\tilde{\varphi}(\mathbf{x}, t) &= \varphi(\mathbf{x}, \mathcal{K}(t)) \\ &= \mathcal{K}(t) \varphi_{op}(\mathbf{x}) + (1 - \mathcal{K}(t)) \varphi_{cl}(\mathbf{x}), \\ \tilde{\psi}(\mathbf{x}, t) &= \psi(\mathbf{x}, \mathcal{K}(t)) \\ &= \mathcal{K}(t) \psi_{op}(\mathbf{x}) + (1 - \mathcal{K}(t)) \psi_{cl}(\mathbf{x}),\end{aligned}\tag{16}$$

by means of a suitable time dependent *interpolation function*  $\mathcal{K} : \mathbb{R} \rightarrow [0, 1]$ , for all  $t$ , that will be characterized later. Hence, the evolution in time of the two level set functions  $\varphi$  and  $\psi$  depends only on the evolution in time of the function  $\mathcal{K}$ . Note that the two distance functions  $\varphi_{op}$  and  $\varphi_{cl}$  must use the same sign convention, i.e. negative values within the aortic valve (where the blood flows from the ventricle to the aortic root) and positive outside it.

Now, we define the velocity of the aortic valve  $\mathbf{u}_\Gamma$ . We observe that the movement between its closed and its open position is mainly orthogonal to the valve surface  $\Gamma$ . Thus, we assume the velocity of the valve  $\mathbf{u}_\Gamma$  to have the same direction of the normal to the surface of the valve represented by  $\varphi$ . Therefore, by exploiting the properties of the level set functions (Osher and Fedkiw, 2001) and the fact that  $\varphi$  is also a signed distance function ( $|\nabla\varphi| = 1$ ), we define the velocity of the valve as:

$$\begin{aligned}\tilde{\mathbf{u}}_\Gamma(\mathbf{x}, t) &= -\frac{\partial\tilde{\varphi}(\mathbf{x}, t)}{\partial t} \nabla\tilde{\varphi}(\mathbf{x}, t) \\ &= -\frac{\partial\varphi(\mathbf{x}, \mathcal{K})}{\partial\mathcal{K}} \frac{d\mathcal{K}(t)}{dt} \nabla\varphi(\mathbf{x}, \mathcal{K}(t)).\end{aligned}\tag{17}$$

Indeed, the vector  $\nabla\tilde{\varphi}$  is equivalent to the normal of the surface  $\mathbf{n}_\Gamma$  (positive outside the aortic valve, coherently with the sign convention), while the scalar function  $-\partial\tilde{\varphi}/\partial t$  is related to the magnitude of the velocity field  $\tilde{\mathbf{u}}_\Gamma$  (Osher and Fedkiw, 2001) since we assumed  $\mathbf{u}_\Gamma = (\mathbf{u}_\Gamma \cdot \mathbf{n}_\Gamma)\mathbf{n}_\Gamma$ . We notice that, if the valve is opening,  $-\partial\tilde{\varphi}/\partial t$  is positive and the velocity  $\tilde{\mathbf{u}}_\Gamma$  takes the same direction and verse of the surface normal  $\mathbf{n}_\Gamma$ ; on the contrary, if the valve is closing the quantity  $-\partial\tilde{\varphi}/\partial t$  is negative and the velocity  $\tilde{\mathbf{u}}_\Gamma$  takes the opposite verse of the surface normal  $\mathbf{n}_\Gamma$ . Finally, by using the definition (16) of the distance function

$k_p$	$k_f$	$k_b$	$k_v$	$\vartheta_{min}$	$\vartheta_{max}$
$5500 \frac{rad}{s^2 mmHg}$	$50 s^{-1}$	$2 \frac{rad}{sm}$	$7 \frac{rad}{sm}$	$5^\circ$	$75^\circ$

Table 1: Parameters of the AV-0D model for the aortic valve angle from Korakianitis and Shi (2006).

$\varphi$ , we express  $\mathbf{u}_\Gamma$  through the function  $\mathcal{K}(t)$  as:

$$\begin{aligned} \mathbf{u}_\Gamma(\mathbf{x}, \mathcal{K}(t)) = & \frac{d\mathcal{K}(t)}{dt} (\varphi_{cl}(\mathbf{x}) - \varphi_{op}(\mathbf{x})) \\ & \cdot (\mathcal{K}(t) \nabla \varphi_{op}(\mathbf{x}) + (1 - \mathcal{K}(t)) \nabla \varphi_{cl}(\mathbf{x})). \end{aligned} \quad (18)$$

Eqs. (15), (16), and (18) determine our approach to apply the general RIIS model to the Aortic Valve (AV-RIIS). In summary, we describe explicitly the aortic valve in the open and closed configurations through  $\varphi_{op}$  and  $\varphi_{cl}$ , while we obtain the intermediate configurations and the valve velocity  $\mathbf{u}_\Gamma$  through the choice of a suitable function  $\mathcal{K}(t)$ ; we outline our approach to determine  $\mathcal{K}(t)$  in Section 2.4.

### 2.3 The OD Model for the Aortic Valve Angle (AV-0D)

We exploit the 0D model proposed by Korakianitis and Shi (2006) for the aortic valve (AV-0D model) to model in a realistic way its behavior during the cardiac cycle. The AV-0D model consists in a ODE with the opening angle  $\vartheta(t)$  of the valve as dependent variable, for which the forces acting on the valve are modeled by using the pressure in the left ventricle  $P_{lv}$ , the pressure in the first section of the ascending aorta  $P_{ao}$ , and the flow rate in the ascending aorta  $Q_{ao}$  as:

$$\left\{ \begin{aligned} \frac{d^2\vartheta(t)}{dt^2} + k_f \frac{d\vartheta(t)}{dt} = & \\ & = k_p (P_{lv}(t) - P_{ao}(t)) \cos(\vartheta(t)) \\ & - k_v \operatorname{sgn}(Q_{ao}(t)) Q_{ao}(t) \sin(2\vartheta(t)) \\ & + k_b Q_{ao}(t) \cos(\vartheta(t)) \quad \forall t \in (0, T), \\ \vartheta(0) = & \vartheta_{min}, \\ \frac{d\vartheta(0)}{dt} = & 0, \end{aligned} \right. \quad (19)$$

where  $\operatorname{sgn}(\cdot)$  is the sign function;  $k_f$ ,  $k_p$ ,  $k_v$ , and  $k_b$  are suitable valve parameters. Since the aortic valve yields a fixed angle when totally open or closed, the model also defines minimum  $\vartheta_{min}$  and maximum  $\vartheta_{max}$  angles leading to the constraint  $\vartheta(t) \in [\vartheta_{min}, \vartheta_{max}]$ , for all  $t$ . The values of the parameters originally proposed in (Korakianitis and Shi, 2006) for a physiological aortic valve are shown in Table 1.

## 2.4 Coupling the AV-0D and the AV-RIIS Models

We now couple the (3D) AV-RIIS fluid dynamics model with the AV-0D valve model. First, we define the relations between the pressure values  $P_{lv}$  and  $P_{ao}$  and the flow rate  $Q_{ao}$  involved in the AV-0D model (19) and the pressure  $p$  and the velocity  $\mathbf{u}$  in the AV-RIIS 3D model as:

$$\begin{aligned} P_{lv}(t) &= |\Omega_{lv}|^{-1} \int_{\Omega_{lv}} p(\mathbf{x}, t) d\mathbf{x}, \\ P_{ao}(t) &= |\Omega_{ao}|^{-1} \int_{\Omega_{ao}} p(\mathbf{x}, t) d\mathbf{x}, \\ Q_{ao}(t) &= - \int_{\partial\Omega_{in}} \mathbf{u}(\mathbf{x}, t) \cdot \mathbf{n}_{in}(\mathbf{x}) d\gamma, \end{aligned} \quad (20)$$

where  $\Omega_{lv}$  and  $\Omega_{ao}$  are two suitable control volumes taken upstream the aortic valve (i.e. in the proximity of the left ventricle base) and downstream (at the initial section of the ascending aorta), respectively.

We now link the AV-RIIS model to the AV-0D model through the interpolation function  $\mathcal{K}(t)$  of Eq. (16). We introduce for this reason the concept of the valvular plane  $\Gamma_{vp}$ , a fixed plane parallel to the annulus (Charitos and Sievers, 2013) used in radiology to track the dynamics of the valve and of its orifice. In the AV-RIIS model, exploiting  $\Gamma_{vp}$  and the negative part of the distance function  $\varphi$  of Eq. (16), we express the Orifice Area (OA) of the valve in terms of  $\mathcal{K}$  as:

$$OA(\mathcal{K}) = \int_{\Gamma_{vp}} \chi_{\{\mathbf{x}: \varphi(\mathbf{x}, \mathcal{K}) < 0\}} d\gamma, \quad (21)$$

where  $\chi$  is the characteristic function. Equivalently, we can define the orifice area corresponding to the fully open valve, say  $OA_{max}$ , using the level set function  $\varphi_{op}$ :

$$OA_{max} = \int_{\Gamma_{vp}} \chi_{\{\mathbf{x}: \varphi_{op}(\mathbf{x}) < 0\}} d\gamma. \quad (22)$$

Korakianitis and Shi (2006) introduced the Area Resistance ( $AR_{ao}$ ) coefficient representing the resistance to the blood flow through the orifice; in this AV-0D model,  $AR_{ao}$  is dependent on the opening angle  $\vartheta$  as:

$$AR_{ao}(\vartheta) = \frac{(1 - \cos(\vartheta))^2}{(1 - \cos(\vartheta_{max}))^2}. \quad (23)$$

We define the coefficient  $\widetilde{AR}_{ao}$  as the opening fraction of the valvular orifice in terms of  $\mathcal{K}$  as:

$$\widetilde{AR}_{ao}(\mathcal{K}) := \frac{OA(\mathcal{K})}{OA_{max}}. \quad (24)$$

Then, we find  $\mathcal{K}$  such that:  $\widetilde{AR}_{ao}(\mathcal{K}) \equiv AR_{ao}(\vartheta)$  for any given  $\vartheta$ ; this corresponds to reinterpret the resistance to the blood flow introduced by Korakianitis and

Shi (2006) as the fraction of opening of the valvular orifice. Since  $\widetilde{AR}_{ao}$  depends only on the function  $\mathcal{K}$ , enforcing  $\widetilde{AR}_{ao}(\mathcal{K}) \equiv AR_{ao}(\vartheta)$  couples the AV-0D and the AV-RIIS models; more explicitly, we have the following nonlinear coupling equation:

$$OA(\mathcal{K}(t)) - AR_{ao}(\vartheta(t)) OA_{max} = 0 \quad \forall t \in (0, T). \quad (25)$$

## 2.5 The Reduced 3D-0D FSI Model

We write now the fully coupled reduced 3D-0D FSI model: for all  $t \in (0, T)$ , find  $\mathbf{u} : \Omega \rightarrow \mathbb{R}^3$ ,  $p : \Omega \rightarrow \mathbb{R}$ ,  $\vartheta \in [\vartheta_{min}, \vartheta_{max}]$ , and  $\mathcal{K} \in [0, 1]$  such that, for all  $\mathbf{v} \in V_0$  and  $q \in Q$ :

$$\begin{aligned} \text{AV-RIIS} & \left\{ \begin{aligned} & \left( \rho \frac{\partial \mathbf{u}}{\partial t}, \mathbf{v} \right) + \bar{a}(\mathbf{u}, \mathbf{v}, \mathcal{K}) \\ & + c(\mathbf{u}, \mathbf{u}, \mathbf{v}) + b(\mathbf{v}, p) = F(\mathbf{v}) \\ & - b(\mathbf{u}, q) = 0 \end{aligned} \right. \\ \text{AV-0D} & \left\{ \begin{aligned} & \frac{d^2 \vartheta}{dt^2} + k_f \frac{d\vartheta}{dt} = \\ & = k_p (P_{lv} - P_{ao}) \cos(\vartheta) \\ & - k_v \operatorname{sgn}(Q_{ao}) Q_{ao} \sin(2\vartheta) \\ & + k_b Q_{ao} \cos(\vartheta) \end{aligned} \right. \\ \text{coupling} & \{ OA(\mathcal{K}) - AR_{ao}(\vartheta) OA_{max} = 0, \end{aligned} \quad (26)$$

with initial conditions  $\mathbf{u}(\mathbf{x}, 0) = \mathbf{0}$ ,  $\vartheta(0) = \vartheta_{min}$ , and  $d\vartheta/dt(0) = 0$  (for which also  $\mathcal{K}(0) \equiv 0$ ), where:

$$\begin{aligned}
\bar{a}(\mathbf{u}, \mathbf{v}, \mathcal{K}) &:= \tilde{a}(\mathbf{u}, \mathbf{v}) + \bar{a}_{RIIS}(\mathbf{u}, \mathbf{v}, \mathcal{K}), \\
\tilde{a}(\mathbf{u}, \mathbf{v}) &= 2\mu \int_{\Omega} \mathbf{D}(\mathbf{u}) : \mathbf{D}(\mathbf{v}) \, d\mathbf{x}, \\
\bar{a}_{RIIS}(\mathbf{u}, \mathbf{v}, \mathcal{K}) &= \frac{R_{\Gamma}}{\varepsilon} \int_{\Omega} (1 - \mathcal{H}(\psi(\mathcal{K}))) \\
&\quad \cdot \delta_{\varepsilon}(\varphi(\mathcal{K}))(\mathbf{u} - \mathbf{u}_{\Gamma}) \cdot \mathbf{v} \, d\mathbf{x}, \\
\varphi(\mathcal{K}) &= \mathcal{K} \varphi_{op} + (1 - \mathcal{K}) \varphi_{cl}, \\
\psi(\mathcal{K}) &= \mathcal{K} \psi_{op} + (1 - \mathcal{K}) \psi_{cl}, \\
\mathbf{u}_{\Gamma}(\mathcal{K}) &= \frac{d\mathcal{K}}{dt} (\varphi_{cl} - \varphi_{op}) \\
&\quad \cdot (\mathcal{K} \nabla \varphi_{op} + (1 - \mathcal{K}) \nabla \varphi_{cl}), \\
b(\mathbf{v}, p) &= - \int_{\Omega} p \nabla \cdot \mathbf{v} \, d\mathbf{x}, \\
c(\mathbf{w}, \mathbf{u}, \mathbf{v}) &= \rho \int_{\Omega} ((\mathbf{w} \cdot \nabla) \mathbf{u}) \cdot \mathbf{v} \, d\mathbf{x}, \\
F(\mathbf{v}) &= \int_{\partial\Omega_{in}} p_{in} \mathbf{n}_{in} \cdot \mathbf{v} \, d\gamma \\
&\quad + \int_{\partial\Omega_{out}} p_{out} \mathbf{n}_{out} \cdot \mathbf{v} \, d\gamma, \\
P_{lv} &= |\Omega_{lv}|^{-1} \int_{\Omega_{lv}} p \, d\mathbf{x}, \\
P_{ao} &= |\Omega_{ao}|^{-1} \int_{\Omega_{ao}} p \, d\mathbf{x}, \\
Q_{ao} &= - \int_{\partial\Omega_{in}} \mathbf{u} \cdot \mathbf{n}_{in} \, d\gamma, \\
OA(\mathcal{K}) &= \int_{\Gamma_{vp}} \chi_{\{\mathbf{x}: \varphi(\mathbf{x}, \mathcal{K}) < 0\}} \, d\gamma, \\
AR_{ao}(\vartheta) &= \frac{(1 - \cos(\vartheta))^2}{(1 - \cos(\vartheta_{max}))^2}.
\end{aligned} \tag{27}$$

The coupled model of Eq. (26) is a reduced FSI model in the sense that the movement of the aortic valve is described by means of a single variable, the (idealized) opening angle  $\vartheta$  through a 0D ODE.

### 3 Numerical Approximation

We focus on the numerical approximation of the fully coupled model (26). First, we discretize the three submodels of the problem (26) separately.

### 3.1 AV-RIIS Model: Space and Time Discretizations

The AV-RIIS model of Eq. (26) is discretized in space using the stabilized FE method (Quarteroni, 2014) for which the approximated velocity and pressure variables are built from Lagrangian polynomial basis functions of equal degree. More formally, let  $\mathcal{T}_h$  be a tetrahedralization of our domain  $\Omega \subset \mathbb{R}^3$  representing the aortic root such that  $\Omega = \bigcup_{T \in \mathcal{T}_h} T$  and  $h = \max_{T \in \mathcal{T}_h}(\text{diam}(T))$ . We introduce the space:

$$X_h^r = \{v_h \in C^0(\bar{\Omega}) : v_h|_T \in \mathbb{P}^r, r \geq 1, \forall T \in \mathcal{T}_h\}, \quad (28)$$

where we denote with  $\mathbb{P}^r$  the finite dimensional space of polynomials of degree  $r$ . We define the FE spaces for the velocity as  $V_h^r = ([X_h^r]^3 \cap V_0)$  and for the pressure as  $Q_h^r = X_h^r \cap Q$ .

We consider the time discretization by means of Backward Differentiation Formula (BDF) of a generic order  $\sigma = 1, 2, \dots$  and by adopting a semi-implicit treatment for the nonlinear term, through equal order extrapolation (Gauthier et al, 2004). In order to limit the computational burden of the spatial discretization we choose FE spaces  $V_h^r$  and  $Q_h^r$ , which are not inf-sup stable and require a suitable stabilization. In order to obtain a stable formulation and to control numerical instabilities associated to the highly advective flow regime in the valve, we consider and extend to the AV-RIIS case the Streamline Upwind Petrov Galerkin (SUPG) stabilization for the Navier-Stokes equations. Furthermore, as proposed by Forti and Dedè (2015) for time discretization based on the BDF scheme, we set the SUPG parameters in a straightforward way following the Variational Multiscale (VMS) concept (Bazilevs et al, 2007). More in details, after partitioning the time interval  $(0, T)$  into time instants  $\{t_n\}_{n=0}^N$  equally spaced by  $\Delta t$ , we stabilize both the momentum and the continuity equation as follows: for all  $n \geq \sigma$ , assuming that  $\mathcal{K}^n$  and  $\mathbf{u}_h^{n-i}$  for  $i = 1, \dots, \sigma$  are given, we find  $\mathbf{u}_h^n \in V_h^r$  and  $p_h^n \in Q_h^r$  such that:

$$\begin{aligned} & \left( \rho \frac{\alpha_\sigma \mathbf{u}_h^n - \mathbf{u}_h^{n,BDF\sigma}}{\Delta t}, \mathbf{v}_h \right) + \bar{a}(\mathbf{u}_h^n, \mathbf{v}_h, \mathcal{K}^n) \\ & + c(\mathbf{u}_h^{n,\sigma}, \mathbf{u}_h^n, \mathbf{v}_h) + b(\mathbf{v}_h, p_h^n) - b(\mathbf{u}_h^n, q_h) \\ & + (\tau_M^{n,\sigma} \mathbf{r}_M^n(\mathbf{u}_h^n, p_h^n), \rho(\mathbf{u}_h^{n,\sigma} \cdot \nabla) \mathbf{v}_h + \nabla q_h) \\ & - (\tau_C^{n,\sigma} r_C^n(\mathbf{u}_h^n), \nabla \cdot \mathbf{v}_h) = F(\mathbf{v}_h) \end{aligned} \quad (29)$$

for all  $\mathbf{v}_h \in V_h^r$  and  $q_h \in Q_h^r$ , where  $\bar{a}(\cdot, \cdot)$ ,  $b(\cdot, \cdot)$ ,  $c(\cdot, \cdot, \cdot)$ ,  $F(\cdot)$  are defined in Eq. (27) and  $\alpha_\sigma$ ,  $\mathbf{u}_h^{n,BDF\sigma}$ , and the extrapolated velocity  $\mathbf{u}_h^{n,\sigma}$  depend on the order  $\sigma$  of the BDF scheme; see (Forti and Dedè, 2015). The two terms  $\mathbf{r}_M^n$  and  $r_C^n$  represent the residuals of the momentum and continuity equations, the former

including the RIIS term:

$$\begin{aligned}
\mathbf{r}_M^n(\mathbf{u}_h^n, p_h^n) &= \rho \frac{\alpha_\sigma \mathbf{u}_h^n - \mathbf{u}_h^{n,BDF\sigma}}{\Delta t} - \mu \Delta \mathbf{u}_h^n \\
&+ \rho (\mathbf{u}_h^{n,\sigma} \cdot \nabla) \mathbf{u}_h^n + \nabla p_h^n \\
&+ \frac{R_\Gamma}{\varepsilon} (1 - \mathcal{H}(\psi(\mathcal{K}^n))) \delta_\varepsilon(\varphi(\mathcal{K}^n)) (\mathbf{u}_h^n - \mathbf{u}_\Gamma^n), \\
r_C^n(\mathbf{u}_h^n) &= \nabla \cdot \mathbf{u}_h^n,
\end{aligned} \tag{30}$$

while  $\tau_M^{n,\sigma}$  and  $\tau_C^{n,\sigma}$  are the stabilization parameters, set as:

$$\begin{aligned}
\tau_M^{n,\sigma} &= \left( \frac{4\rho^2}{\Delta t^2} + \frac{\rho^2}{h^2} |\mathbf{u}_h^{n,\sigma}|^2 + C_r \frac{\mu^2}{h^4} \right. \\
&\quad \left. + \frac{R_\Gamma^2}{\varepsilon^2} (1 - \mathcal{H}(\psi(\mathcal{K}^n)))^2 \delta_\varepsilon^2(\varphi(\mathcal{K}^n)) \right)^{-\frac{1}{2}}, \\
\tau_C^{n,\sigma} &= \frac{h^2}{\tau_M^{n,\sigma}},
\end{aligned} \tag{31}$$

where  $C_r = 60 \cdot 2^{r-2}$ . We remark that, as in Forti and Dedè (2015), we extrapolate both the residual and the stabilization parameters in time according to the BDF scheme. The stabilization parameters (31) strictly depend on the local spatial discretization  $h$  and on the local velocity magnitude (Forti and Dedè, 2015). Moreover, in our approach,  $\tau_M^{n,\sigma}$  and  $\tau_C^{n,\sigma}$  also depend on the resistive term and its location in  $\Omega$  through  $\Gamma$ ; the choice of  $\tau_M^{n,\sigma}$  is motivated by the presence of the RIIS term in the momentum equation of the Navier-Stokes equations. Concerning the RIIS term in  $\bar{a}(\mathbf{u}_h^n, \mathbf{v}_h, \mathcal{K}^n)$ , we evaluate the two level set functions  $\varphi$  and  $\psi$  at the current time using  $\mathcal{K}^n$  and, coherently, we use a BDF scheme to discretize the time derivative of  $\mathcal{K}$ , as:

$$\begin{aligned}
\bar{a}_{RIIS}(\mathbf{u}_h^n, \mathbf{v}_h, \mathcal{K}^n) &= \frac{R_\Gamma}{\varepsilon} \int_\Omega (1 - \mathcal{H}(\psi(\mathcal{K}^n))) \\
&\quad \cdot \delta_\varepsilon(\varphi(\mathcal{K}^n)) (\mathbf{u}_h^n - \mathbf{u}_\Gamma^{n,\sigma}) \cdot \mathbf{v}_h \, d\mathbf{x}, \\
\mathbf{u}_\Gamma^{n,\sigma} &= \frac{\alpha^\sigma \mathcal{K}^n - \mathcal{K}^{n,BDF\sigma}}{\Delta t} (\varphi_{cl} - \varphi_{op}) \\
&\quad \cdot (\mathcal{K}^n \nabla \varphi_{op} + (1 - \mathcal{K}^n) \nabla \varphi_{cl}).
\end{aligned} \tag{32}$$

We remark that the level set functions  $\varphi_{cl}$ ,  $\varphi_{op}$ ,  $\psi_{cl}$ , and  $\psi_{op}$  are not discretized in space, since we define them analytically (as described in Section 4); hence, these can be evaluated directly at the quadrature nodes. Even if the described method can be solved with an arbitrary order  $\sigma$  of the BDF scheme, we will

adopt a second order scheme (BDF2,  $\sigma = 2$ ) for which:

$$\begin{aligned}\alpha_\sigma &= \frac{3}{2}, \\ \mathbf{u}_h^{n,BDF\sigma} &= 2\mathbf{u}_h^{n-1} - \frac{1}{2}\mathbf{u}_h^{n-2}, \\ \mathbf{u}_h^{n,\sigma} &= 2\mathbf{u}_h^{n-1} - \mathbf{u}_h^{n-2}, \\ \mathcal{K}^{n,BDF\sigma} &= 2\mathcal{K}_h^{n-1} - \frac{1}{2}\mathcal{K}_h^{n-2}.\end{aligned}\tag{33}$$

### 3.2 The Reduced 3D-0D FSI Model: Numerical Approximation

Given the initial condition  $\mathbf{u}_h^j = \mathbf{0}$  and  $\vartheta^j = \vartheta_{min}$  ( $\mathcal{K}^j = 0$ ), for  $j = 0, \dots, \sigma - 1$ , the numerical solution of the full system (26) consists in a staggered strategy based on the semi-implicit discretization of the AV-RIIS model and an explicit scheme for the AV-OD model: at each time instant  $t^n$  for which  $n \geq \sigma$ , given  $P_{lv}^{n-1}$ ,  $P_{ao}^{n-1}$ ,  $Q_{ao}^{n-1}$ ,  $\vartheta^{n-1}$ ,  $\mathbf{u}_h^{n-i}$ ,  $\mathcal{K}^{n-i}$ ,  $i = 1, \dots, \sigma$ , we find  $\mathbf{u}_h^n$ ,  $p_h^n$ ,  $\vartheta^n$  and  $\mathcal{K}^n$  as follows:

1. find  $\vartheta^n$  solving the AV-0D ODE in (26) with an explicit fourth order Runge-Kutta method (Quarteroni et al, 2010), using  $\vartheta^{n-1}$ ,  $P_{lv}^{n-1}$ ,  $P_{ao}^{n-1}$ , and  $Q_{ao}^{n-1}$ ;
2. given  $\vartheta^n$ , find  $\mathcal{K}^n \in [0, 1]$  solving the nonlinear coupling equation (25) using the bisection method; indeed, we reinterpret the equation as the root finding of a nonlinear monotone function  $G$  in  $\mathcal{K}^n$  such that  $G(0)G(1) \leq 0$  for all  $\vartheta^n \in [\vartheta_{min}, \vartheta_{max}]$ , where:

$$G(\mathcal{K}^n) = OA(\mathcal{K}^n) - \frac{(1 - \cos(\vartheta^n))^2}{(1 - \cos(\vartheta_{max}))^2} OA_{max};\tag{34}$$

3. given  $\mathcal{K}^n$ , find the solution of the discrete AV-RIIS model  $(\mathbf{u}_h^n, p_h^n)$  solving the linear system stemming from the semi-implicit formulation (29);
4. update  $P_{lv}^n$ ,  $P_{ao}^n$ , and  $Q_{ao}^n$  using Eq. (20) and the computed solution  $(\mathbf{u}_h^n, p_h^n)$  of the AV-RIIS model.

## 4 Patient-Specific Modeling: Geometry and Boundary Conditions

In this section, we focus on the patient-specific geometry reconstruction of the aortic root and valve from medical images; first, we deal with a reference dataset and then with the description of the methods used to reconstruct the aortic root and lumen and the aortic valve leaflets. We describe our method by applying it to the reference dataset without loss of generality. Similarly, it can be applied to any other medical image provided the valve leaflets are at least partially visible in their closed and open configurations.

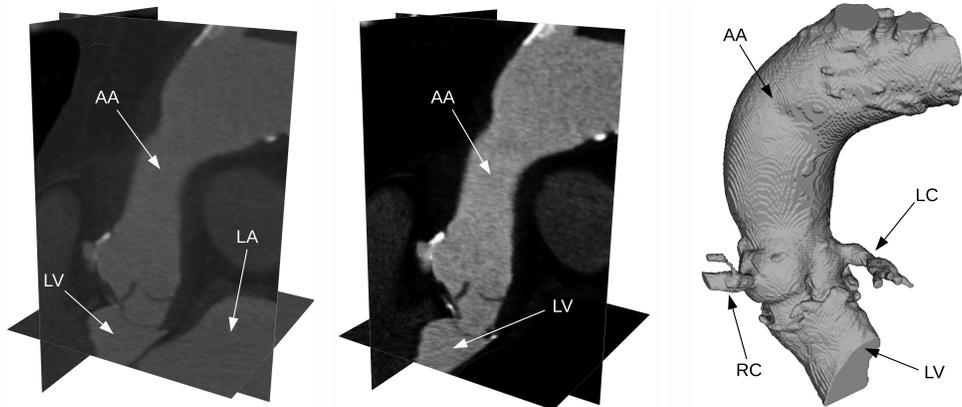


Figure 2: Aortic lumen reconstruction: original diastolic 3D-CE-CT image cropped in proximity of the region of interest (left), preprocessed image (center) and reconstructed surface (right). The ascending aorta (AA), the left ventricle (LV), the left atrium (LA), and the right (RC) and left (LC) coronary arteries are indicated.

#### 4.1 Patient Dataset

The data that we use correspond to a patient routinely referred to the Cardiac Surgery Department of Ospedale Sacco, Milano, Italy. A Philips Brilliance CT 64-slice system is employed to perform a 3D Contrast Enhanced Computed Tomography (3D-CE-CT) study with a slice thickness of  $0.67\text{ mm}$ , a slice spacing of  $0.33\text{ mm}$ , a reconstruction matrix of  $512 \times 512$  pixels, and a final resolution of  $0.45\text{ mm} \times 0.45\text{ mm} \times 0.33\text{ mm}$ . The 3D-CE-CT images were acquired by a retrospective ECG-gated protocol and 10 scan volumes were generated at different instants of the cardiac cycle. The International Review Broad approval was obtained for the conduct of this study and the board waived the need for patient consent.

#### 4.2 Aortic Lumen Reconstruction

A surface model of the last part of the left ventricle, the aortic root, and the ascending aorta is obtained from the medical images previously described. In particular, we select a diastolic image from those available because this configuration is assumed for the most part of the cardiac cycle (Figure 2, left). We use a region-based segmentation technique named Connected Component Localization of the Region-Scalable Fitting Energy originally proposed in Fedele et al (2015). The method is based on the minimization of the Region Scalable Fitting Energy through the Split-Bregman method as proposed in Yang et al (2010) and incorporates an iterative Connected Component extraction. Since the method depends on the image intensity values, we perform an image preprocessing to enhance the contrast between the aorta vessel and the background and to delete

the nearby organs with similar image intensity (Fedele et al, 2015) (Figure 2, center). We highlight that we choose this method because of its ability to automatically reconstruct in a single step and in a precise way the aortic root with the Sinuses of Valsalva, the ascending aorta, and the aortic arch. The output of the method is a triangulated surface representing the interface between the vessel lumen and the arterial wall, see Figure 2, right.

### 4.3 Aortic Valve Reconstruction

We describe how to analytically define the two pairs of level set functions  $(\varphi_{cl}, \psi_{cl})$  and  $(\varphi_{op}, \psi_{op})$  which represent the two valve configurations. Indeed, we recall that, consistently with Eq. (9), we define the implicit surfaces representing the closed valve  $\Gamma_{cl}$  and the open valve  $\Gamma_{op}$  as:

$$\begin{aligned}\Gamma_{cl} &= \{\mathbf{x} \in \Omega : \varphi_{cl}(\mathbf{x}) = 0 \text{ and } \psi_{cl}(\mathbf{x}) \leq 0\}, \\ \Gamma_{op} &= \{\mathbf{x} \in \Omega : \varphi_{op}(\mathbf{x}) = 0 \text{ and } \psi_{op}(\mathbf{x}) \leq 0\}.\end{aligned}\tag{35}$$

The general idea of our reconstruction method consists in selecting in the diastolic and systolic images some sets of control points lying on the leaflets, and then performing a polynomial fitting on each resulting cloud of points associated either to  $\Gamma_{cl}$  or  $\Gamma_{op}$ ; finally, such polynomials are combined in order to define an expression for each level set function.

As a preliminary step, we semi-automatically rotate the 3D-CE-CT reference system in order to have the  $z$ -axis growing distally and orthogonally to the valvular plane, which in radiology is referred as the plane passing through the aortic annulus (Charitos and Sievers, 2013). Choosing a reference system in this way makes the valve leaflets more visible in a 3D-CE-CT image. We apply this rotation to a diastolic image (the same used for the aortic surface reconstruction) and a systolic image in which the leaflets are completely open; concerning the systolic image, the transformation also takes into account for the misregistration between the two acquisitions. In Figure 3, top, we show the closed and open leaflets in a plane orthogonal to the  $z$ -axis of the new reference system  $(x, y, z)$ .

The selection of control points and the polynomial fitting are performed in a different manner for the two valve configurations. In the rest of this section, we indicate with  $p$  the polynomial surfaces described as explicit functions of the  $z$  coordinate ( $z = p(x, y)$ ) and with  $P$  the corresponding implicit descriptions ( $P(\mathbf{x}) = P(x, y, z) = z - p(x, y)$ ); also, we underline the degree of the polynomial as subscript and the related leaflets as superscripts (L, R and N for the left, the right and the non-coronary leaflet, respectively).

**Closed valve.** For each leaflet, we collect three sets of control points: in the distal part, characterized by the region of leaflet coaptation (Figure 3, top-left), we perform two first degree polynomial fittings, each one representing two attached leaflets between two sinuses of Valsalva; instead, the proximal part, where

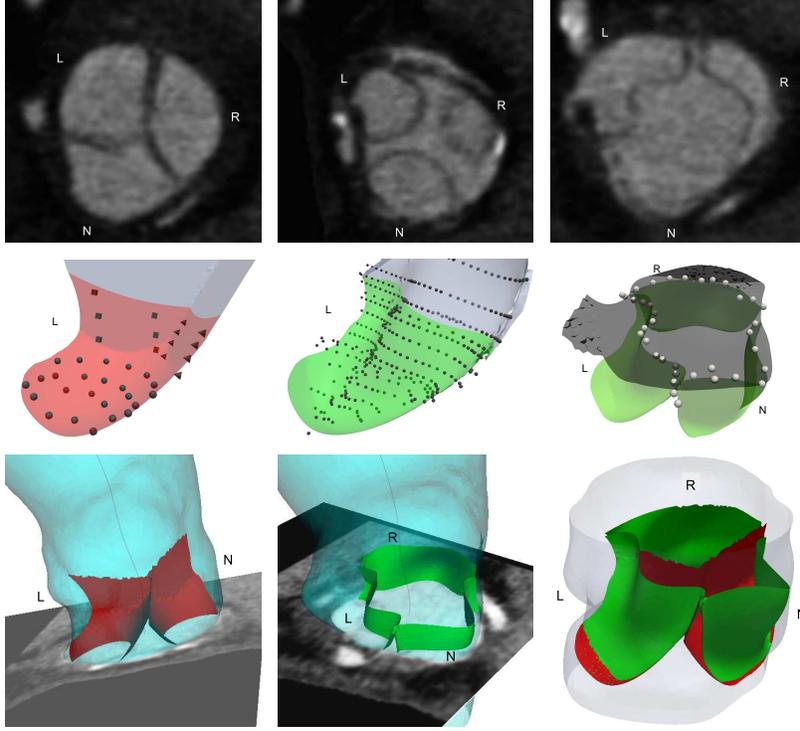


Figure 3: View of the 3D-CE-CT medical image in planes parallel to the valvular plane (top): diastolic image with the distal (top-left) and the proximal (top-center) parts of the closed leaflets and systolic image with the open leaflets (top-right). Three examples of clouds of control points with the corresponding level set in transparency (mid):  $\varphi_{L,cl}$  (mid-left),  $\varphi_{L,op}$  (mid-center) and  $\psi_{op}$  (mid-right). The reconstructed open (bottom-left) and closed (bottom-center) leaflets superimposed to the 3D-CE-CT medical image and compared to each other (bottom-right). The left coronary (L), the right coronary (R) and the non-coronary (N) sinuses of Valsalva are indicated.

the leaflet is clearly separated from the others (Figure 3, top-center), is described by a second degree polynomial. The existence of two clearly distinguishable regions in the closed leaflet is physiological, as reported for example by Charitos and Sievers (2013). As an example, in Figure 3, mid-left, we represent for the left coronary leaflet the three clouds with different shapes of points: the triangular and squared points, where two leaflets are attached to each other, lead to the polynomials  $p_1^{NL}$  and  $p_1^{LR}$ , respectively; the cloud made of circular points leads to the second order polynomial  $p_2^L$ . Consequently, we define the implicit surfaces  $P_1^{NL}(\mathbf{x})$ ,  $P_1^{LR}(\mathbf{x})$  and  $P_2^L(\mathbf{x})$ .

**Open valve.** For each open leaflet (Figure 3, top-right), we proceed as follows: first, as shown for the left coronary leaflet in Figure 3, mid-center, we

collect a unique cloud of points and we repeat at greater  $z$  the points in the final distal part of the leaflet; second, we rotate the coordinate system  $(x, y, z)$  in order to have the  $z$ -axis orthogonal to the leaflet, defining a leaflet-specific reference system; finally, we fit each set of points with an explicit fifth degree polynomial and we find the corresponding implicit description in the original reference system  $(x, y, z)$  applying the opposite rotation to the coordinates. For instance, in the case of the left coronary leaflet the rotation leads to a new reference system  $(x^L, y^L, z^L)$  where we define the explicit polynomial  $p_5^L(x^L, y^L)$  and the corresponding implicit description  $P_5^L(\mathbf{x}^L)$ ; applying the inverse rotation to the coordinates we find the desired implicit surface  $P_5^L(\mathbf{x})$ .

We now define the two level set functions  $\varphi_{op}$  and  $\varphi_{cl}$  as a combination of the implicit polynomial surfaces just defined:

1. for each leaflet, we change the sign of the implicit functions involved in its definition (e.g.  $P_1^{NL}$ ,  $P_1^{LR}$ ,  $P_2^L$ , and  $P_5^L$  for the left coronary leaflet) in order to yield a positive sign outside the valve orifice and a negative one otherwise;
2. for each closed leaflet, we apply the minimum operator to the three involved polynomials; e.g., for the left coronary leaflet we have:

$$\varphi_{L,cl}(\mathbf{x}) = \min \{P_1^{NL}(\mathbf{x}), P_1^{LR}(\mathbf{x}), P_2^L(\mathbf{x})\}; \quad (36)$$

3. for each open leaflet, we apply the minimum operator between the related fifth degree polynomial and the corresponding closed leaflet expression just defined; e.g., for the left coronary leaflet we have:

$$\varphi_{L,op}(\mathbf{x}) = \min \{P_5^L(\mathbf{x}), \varphi_{L,cl}(\mathbf{x})\}, \quad (37)$$

this operation guarantees that the open and closed representations are attached at the same position in the annulus (see Figure 3, bottom-right);

4. for each configuration, we finally define the complete level set functions  $\varphi_{op}$  and  $\varphi_{cl}$  using the maximum operator between the three leaflets expressions:

$$\begin{aligned} \varphi_{op}(\mathbf{x}) &= \max \{\varphi_{N,op}(\mathbf{x}), \varphi_{L,op}(\mathbf{x}), \varphi_{R,op}(\mathbf{x})\} \\ \varphi_{cl}(\mathbf{x}) &= \max \{\varphi_{N,cl}(\mathbf{x}), \varphi_{L,cl}(\mathbf{x}), \varphi_{R,cl}(\mathbf{x})\}. \end{aligned} \quad (38)$$

Concerning the auxiliary level set functions  $\psi_{cl}$  and  $\psi_{op}$ , for each configuration, we select a unique set of points lying on the final distal part of the leaflets (Figure 3, mid-right) and we perform a fifth degree polynomial fitting that defines directly the two implicit expressions. Finally, as last step of the method, we perform a regularization of the level set functions  $\varphi_{cl}$  and  $\varphi_{op}$  in order to ensure that these are signed distance functions (Osher and Fedkiw, 2001) (the regularized function  $\varphi_{op}$  was previously shown in Figure 1, right).

In Figure 3, mid and bottom, we highlight  $\Gamma_{cl}$  and  $\Gamma_{op}$  in red and green, respectively; in Figure 3, mid, we color with pale gray the part of the first level set  $\varphi$  excluded by the auxiliary level set function  $\psi$  and with dark gray the zero level of the function  $\psi_{op}$ . We remark that, the repetition of the points distally in the case of the open leaflet ensures a continuity in the direction of the  $z$ -axis to the level set  $\varphi_{op}$  (Figure 3, mid-center). In Figure 3, bottom, as example of the reliability of our method, we show the final closed and open valve superimposed to the 3D-CE-CT images.

#### 4.4 Mesh Generation

The computational mesh for our simulations is constructed starting from the output of the segmentation method, i.e. the triangular surface representing the aortic lumen (Figure 2, right), consistently rotated according to the reference system defined for the implicit surfaces  $\Gamma_{cl}$  and  $\Gamma_{op}$ .

As first step, we crop the coronary arteries from the model interpolating the resulting hole with a thin plate spline. Then, the surface is cut by planes perpendicular to the lumen longitudinal axis at the left ventricle and at the aortic arch in order to create the inlet and the outlet section, respectively (Figure 4, top-left). To minimize the sensitivity to the boundary conditions that we set, straight flow extensions are added to the inlet and outlet faces of the model. The fluid domain is then created filling the resulting surface with linear tetrahedra with the tool described in Faggiano et al (2013b) and implemented in the Vascular Modeling Toolkit (vmtk<sup>1</sup>). In particular, we first define four regions on the surface: a region near the valve (region 1), a buffer region around the first one (region 2), a third region representing the residual ascending aorta (region 3), and a fourth region representing the flow extensions (region 4). For each of these regions, we set a different mesh refinement obtaining a highly refined mesh in the first region and three different refinements in the other three regions gradually coarsening while moving away from the valve; we show in Figure 4, top-right, an example of this type of refinement in a coarse mesh made of  $10^5$  tetrahedra. The final mesh used for the numerical simulations is composed of  $2.31 \cdot 10^6$  tetrahedra, with the finest region (region 1) characterized by a mean mesh size of  $0.2\text{ mm}$  which is 2.5 times smaller than the coarsest one (region 4).

#### 4.5 Boundary Conditions

The boundary conditions of the AV-RIIS model are two pressure profiles,  $p_{in}$  for the inlet  $\partial\Omega_{in}$  and  $p_{out}$  for the outlet  $\partial\Omega_{out}$  (see Eq. (15)). Concerning the outlet pressure profile  $p_{out}$ , we impose the realistic curve proposed in Korakianitis and Shi (2006) with a minimum pressure value of  $80\text{ mmHg}$  at the beginning of the systole (when the left ventricle pressure overcomes the aortic pressure) and a maximum pressure of  $120\text{ mmHg}$  at late systole (Figure 4, bottom, dashed

---

<sup>1</sup><http://www.vmtk.org>

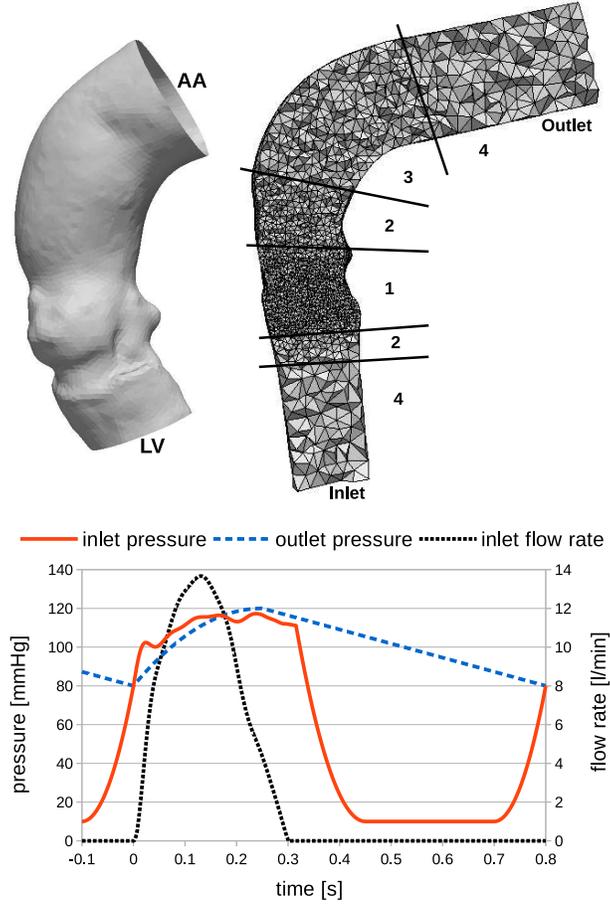


Figure 4: Processed aortic lumen surface (top-left), opened at the left ventricle (LV) and at the aortic arch (AA); an example of a coarse tetrahedral mesh with flow extensions characterized by four different regions of refinement (top-right); the boundary conditions for one heart beat (bottom).

blue curve). Concerning the inlet pressure profile  $p_{in}$ , we take advantage of the available patient-specific data, i.e. the maximum flow rate measured by ultrasound. To this aim we proceed as follows:

1. We perform a first simulation with a fixed open valve (for which  $\mathcal{K} = 1$ ) prescribing at the inlet the flow rate profile of Avolio (1980) rescaled in order to obtain the maximum patient-specific flow rate (Figure 4, bottom, dotted black curve). To prescribe this flow rate, a Dirichlet boundary condition with a flat velocity profile is imposed on the inlet  $\partial\Omega_{in}$  (Faggiano et al, 2013a; Bonomi et al, 2015). In order to work with regime values of pressure and velocities, we run this simulation for three heart beats.
2. We obtain the systolic pressure profile  $p_{in}^{sys}$  as result of the last heart beat

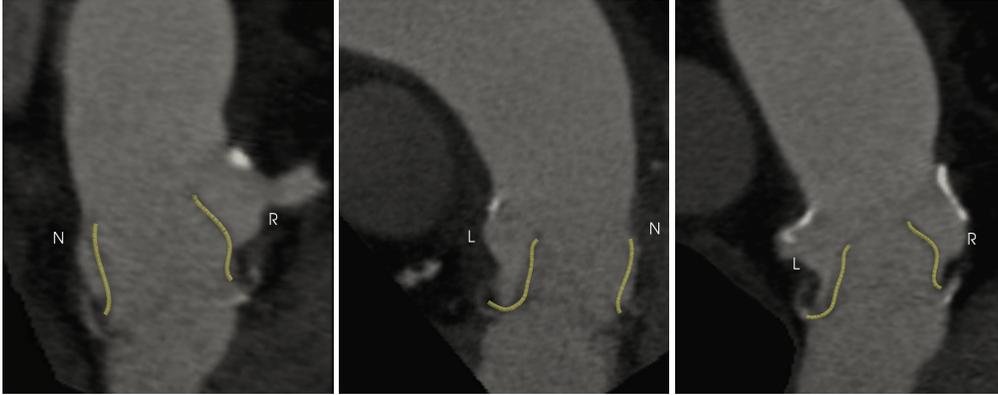


Figure 5: Systolic 3D-CE-CT image of the patient sliced along the non-coronary/right view (left), left/non-coronary view (center) and left/right view (right). The reconstructed open valve is superimposed in bright color. The left (L), the right (R) and the non-coronary (N) sinuses of Valsalva are indicated.

at the inlet.

3. We link such pressure profile  $p_{in}^{sys}$  with a realistic left ventricle diastolic pressure equal to  $10\text{ mmHg}$  (Korakianitis and Shi, 2006) obtaining the complete inlet profile  $p_{in}$  (Figure 4, bottom, continuous red curve).

## 5 Results and Discussion

In order to highlight the capability of our method to reconstruct the patient-specific leaflets, we report in Figure 5 three different views of the systolic 3D-CE-CT image of the patient with the reconstructed open valve superimposed: our method captures the complex geometry of the leaflets, following its curvatures and irregularities. As it can be appreciated also from Figure 3, in the open position the studied leaflets are clearly asymmetrical in both their shape and position with respect to the aortic root: the non-coronary leaflet is almost straight and attached to the wall (Figure 5, left and center); the right-coronary leaflet is characterized by a large space behind it (the right-coronary sinus) and it assumes a standard configuration (Sturla et al, 2013) with two changes in curvature and a profile completely convex toward the sinus (Figure 5, left and right); on the contrary, the left-coronary leaflet appears to be not fully opened and assumes an almost straight configuration in the left-non and right-left views (Figure 5, center and right). These differences are physiological and are specific to this patient. As also highlighted in Faggiano et al (2013a), Della Corte et al (2012) and Bonomi et al (2015), leaflets opening restrictions or asymmetries can influence the flow direction and the generation of helical flow patterns making the patient-specific leaflet reconstruction an important step toward patient-specific

simulations of the aorta (Marom, 2015).

Concerning the numerical simulation, we implement our model in the LifeV library<sup>2</sup>. In particular, the library provides an efficient and flexible parallel framework (based on the *openMPI* standard) to assemble the FE matrices and uses the Trilinos library<sup>3</sup> to deal with preconditioning and resolution of the linear system; see in particular the FSI solvers in (Crosetto et al, 2011), (Deparis et al, 2015), and (Tricceri et al, 2015). The results that we show in this section are obtained running the simulations on a cluster using 192 CPUs, with a mesh composed of  $1.5 \cdot 10^6$  degrees of freedom. We set the blood dynamic viscosity  $\mu = 3.5 \cdot 10^{-3} g/(mm \cdot s)$  and the blood density  $\rho = 10^{-3} g/mm^3$ . We choose the time step equal to  $2 \cdot 10^{-4} s$ ; for time independency, we find that when doubling the time step, the results are not affected by appreciable changes. We set the resistance  $R_\Gamma = 10^6 g/(mm \cdot s)$  to weakly enforce the no-slip condition on the leaflets of the valve, even in case of an high pressure gradient across them. The value of  $\varepsilon$  is chosen equal to  $0.4 mm$ : indeed, since the mesh size near the leaflets is about  $0.3 mm$ , this value of  $\varepsilon$  ensures that the smooth Dirac function  $\delta_\varepsilon$  (Eq. (10)) has support over about three mesh elements.

In Figure 6 we show the evolution of the quantities involved in the AV-0D model ( $P_v$ ,  $P_{ao}$  and  $Q_{ao}$  of Eq. (20)) and the evolution of the valvular angle and of the orifice area: the leaflets start the opening stage when the pressure in the upstream control volume (at the end of the left ventricle) overcomes the one measured downstream (in the aortic root); on the contrary, the closing procedure starts when the downstream pressure exceeds again the upstream pressure at  $t = 0.251 s$ , although the flow rate is still positive for further  $65 ms$ . This behavior is obtained in virtue of the inclusion of the AV-0D model in our method. Indeed, as opposed to other full 3D-FSI approaches (Hsu et al, 2014; Kamensky et al, 2015; De Hart et al, 2003b; Borazjani et al, 2010), our AV-RIIS model has the advantage of being independent on the choice of the stress-free configuration of the valve. As also highlighted by Marom (2015), this choice remains a controversial aspect in case of patient-specific simulations since a stress-free configuration might not exist in native valves; nevertheless, handling this critical aspect is not required by our formulation.

In a physiological aortic valve, the evolution of the orifice area during the systole can be divided into three stages (Leyh et al, 1999; Handke et al, 2003; Van Steenhoven et al, 1981): a rapid opening phase, a slow closure with very small changes of the orifice area, and a rapid closure. The general trend reproduced by our model (Figure 6, bottom) coincides with this three-stages behavior described in the in-vivo studies (Leyh et al, 1999; Handke et al, 2003; Van Steenhoven et al, 1981) with the slow closure approximated by a fixed valve position, as expected by the AV-0D model (Korakianitis and Shi, 2006). The duration of the opening and closing phases is of  $11 ms$  and  $65 ms$ , respectively, which are

---

<sup>2</sup>[www.lifev.org](http://www.lifev.org)

<sup>3</sup>[www.trilinos.org](http://www.trilinos.org)

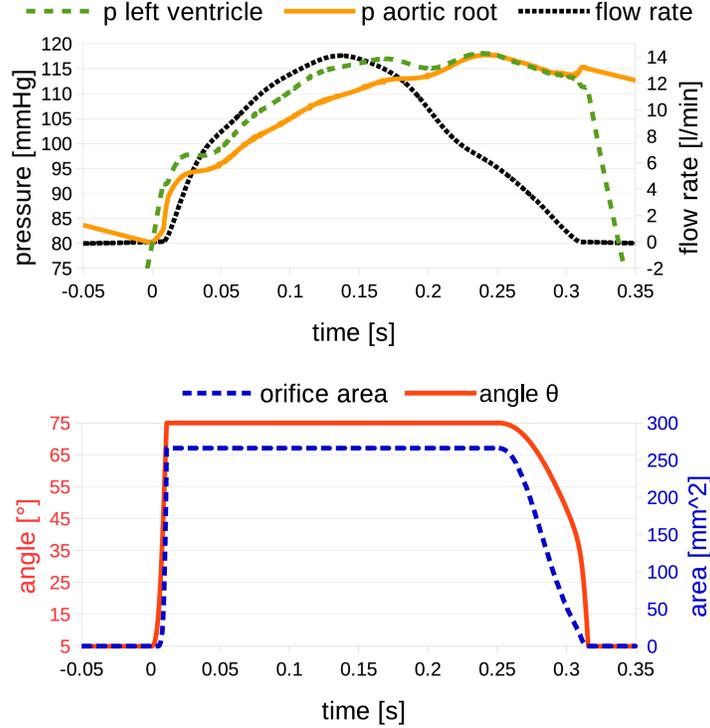


Figure 6: Evolution, during systole, of the quantities driving the AV-0D model (top): the pressure in the control volumes taken upstream ('p left ventricle', dashed green line) and downstream ('p aortic root', continuous orange line) the aortic valve, and the flow rate at the inlet ('flow rate', dotted black line). Evolution (bottom) of the valvular angle  $\vartheta$  (continuous red line) and of the orifice area (dotted blue line).

times comparable to the ones shown by the AV-0D model of Korakianitis and Shi (2006). On the contrary, the in-vivo measurements generally show a slower opening phase (Leyh et al, 1999; Handke et al, 2003): in particular, the study of Handke et al (2003) show average opening and closing times of  $76 \pm 30$  ms and  $42 \pm 16$  ms, respectively. The fact that the opening stage is faster than the realistic one induces an high valve velocity  $\mathbf{u}_\Gamma$  leading to some numerical instability: for this reason we consider in our model  $\mathbf{u}_\Gamma = \mathbf{0}$ , a choice which affects the fluid behavior, in a limited manner, only during the fast valve opening.

The dynamics of the valve is visualized in Figure 7, where a sequence of snapshots in time over the cardiac cycle is shown. The opening and closing configurations assumed by the orifice show a perfect match with the shapes measured in-vivo (Van Steenhoven et al, 1981; Handke et al, 2003), thus demonstrating the capability of our method of reconstructing the intermediate valve shapes from the patient-specific open and closed leaflets. During the opening phase, the shape starts from a stellate configuration (Figure 7, top-left) and becomes triangular

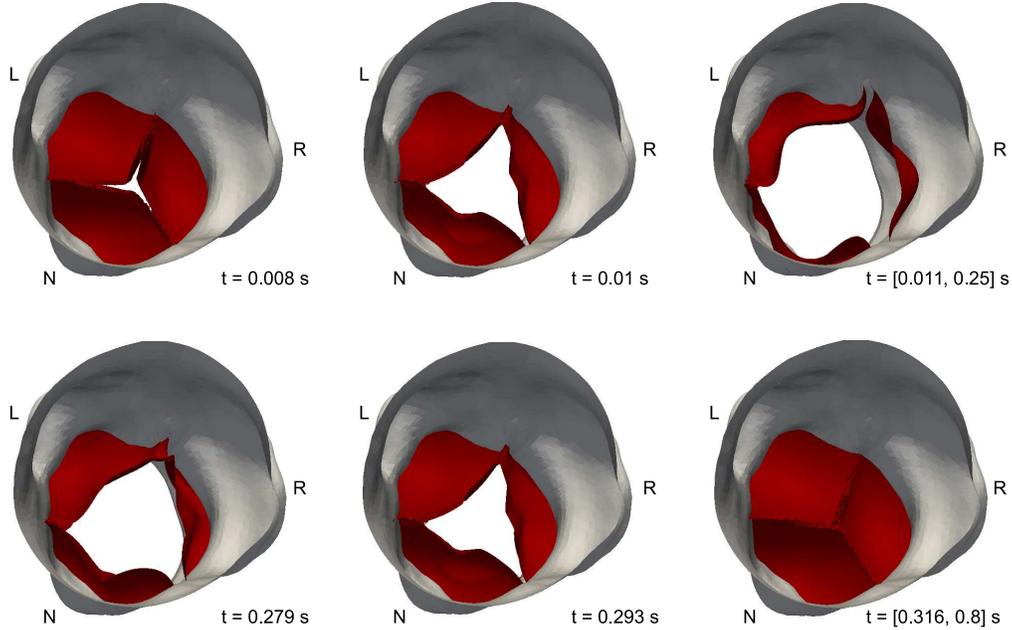


Figure 7: Top view of the aortic valve shape in some instants of the cardiac cycle: opening valve (top) and closing valve (bottom). The left (L), the right (R), and the non-coronary (N) sinuses of Valsalva are indicated.

(Figure 7, top-center) and then circular at the maximum opening (Figure 7, top-right); during the closing procedure, the shape of the valve changes toward a triangular morphology (Figure 7, bottom-left and bottom-center). Finally, at the end of the systole and during the whole diastole the valve is completely closed (Figure 7, bottom-right). Such behavior is also observed, for instance, by Ranga et al (2006), in a simulation performed in a symmetric and idealized geometry; on the contrary, our patient-specific geometry leads to an asymmetric shape of the orifice resulting more similar to the in-vivo images shown by Handke et al (2003).

In Figure 8, we show contours of the velocity magnitude on a long-axis slice at six different time instants during the systole, with the leaflets visible in transparency. First, we remark the performance of our method, since the velocity remains practically null on the leaflets even when the maximum velocity magnitude of about  $1.7$  m/s is reached. The position of the slice passing by the left and the non-coronary sinus allows to analyze the deviation of the flow from the aortic centerline: it is evident that the patient-specific valve geometry influences the flow direction generating an asymmetric jet which impacts the aortic wall at the systolic peak (Figure 8, top-right). Such flow deviation starts to be visible from the end of the early systole (Figure 8, top-center) and becomes more and more evident at late systole (Figure 8, bottom). We emphasize the importance of using the patient-specific geometry of the leaflets in order to obtain such results

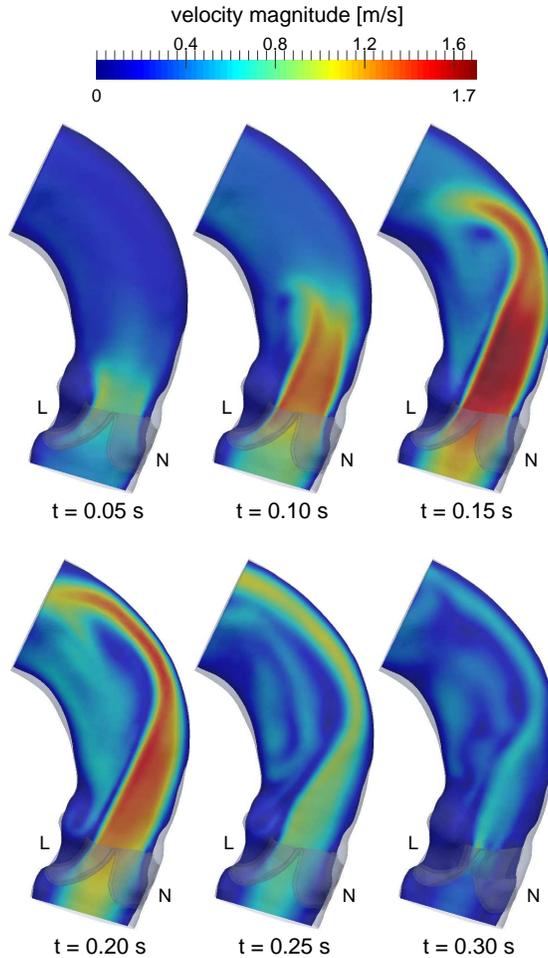


Figure 8: Velocity magnitude contours depicted on a long-axis slice passing by the left (L) and the non-coronary (N) Valsalva sinuses, at six different time instants during systole. The aorta and the leaflets are shown in transparency.

(Marom, 2015); we stress the concept that an idealized symmetric geometry for the aortic root, or even only for the three leaflets, can not capture such complex dynamics of the blood flow (Borazjani et al, 2010; Hsu et al, 2014; Ranga et al, 2006).

In Figure 9, we show at four different times of the cardiac cycle the blood pressure on the same long-axis slice of Figure 8 and inside the volumetric mesh nearby the left coronary leaflet for  $\varphi \in [-0.6, 0.6]$ . The pressure field during the opening of the valve, at the early systole, is visible in Figure 9 ( $t = 0.01s$ ): in this phase the pressure in the left ventricle and in the aortic root is almost homogeneous, with the highest pressure gradient localized among the leaflets. The zoom inside the mesh nearby the left coronary leaflet enhances the localization of the pressure drop in the interior part of the valve, while the external part of

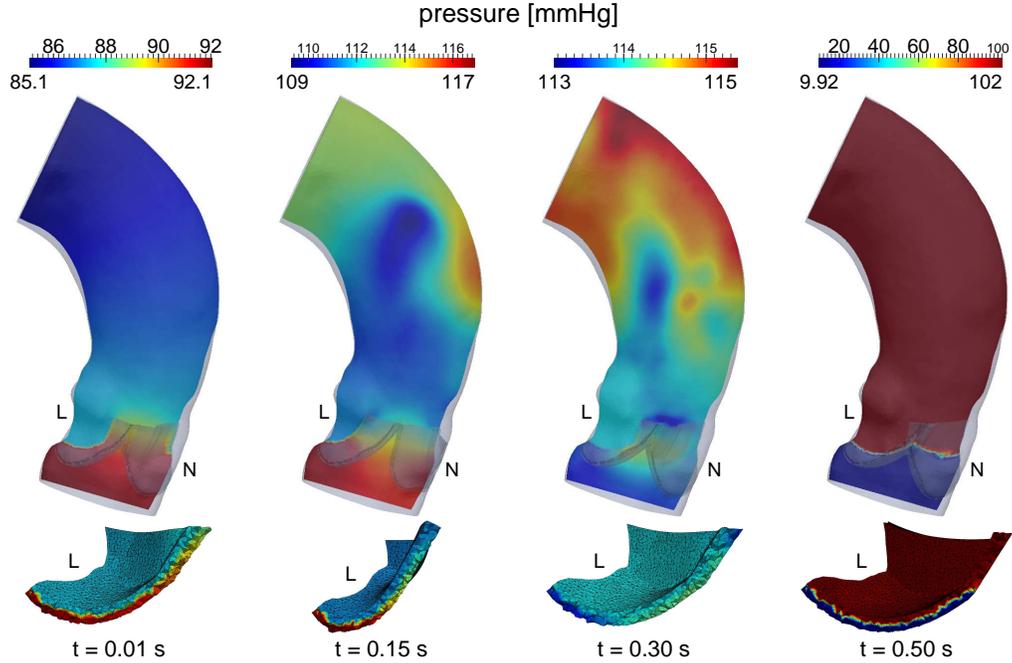


Figure 9: Blood pressure at four different times during the cardiac cycle: pressure depicted on a long-axis slice passing by the left (L) and the non-coronary (N) Valsalva sinuses and on the volumetric mesh zoomed nearby the left coronary leaflet, where the level set function  $\varphi \in [-0.6, 0.6]$  at the current time.

the leaflet is characterized by a constant pressure. At the systolic peak (Figure 9,  $t = 0.15s$ ), we can draw similar considerations concerning the pressure distribution in the left ventricle and in the sinuses of Valsalva, while the situation drastically changes in the ascending aorta. Indeed, the deviation of the flow underlined in Figure 8, top-right, induces a corresponding pressure peak near the wall and, as a consequence, a depression zone in the central part of the ascending aorta. However, in this phase, the pressure in the left ventricle is higher than the average pressure in the aortic root and the valve remains fully open. On the contrary, at the late diastole we notice the opposite situation (Figure 9,  $t = 0.30s$ ): the blood slows down and, despite the flow rate is still positive, the pressure gradient inverts its direction leading to the valve closure. The depression zone is still present in this phase, coherently with the persistent flow deviation (Figure 8, bottom-right). In Figure 9 ( $t = 0.50s$ ), we show an instant of the diastolic phase characterized by the high pressure jump of more than  $90 mmHg$  across the leaflets. By looking at the volumetric mesh of the left coronary leaflet, it is interesting to note how the sharp pressure jump is localized in a region of thickness  $2\varepsilon$  corresponding to about three mesh elements, i.e. basically where the RIIS resistive term extend its action; on the contrary, outside this region, the pressure is not affected by this high pressure jump taking values with small

oscillations around the lowest and the highest values of the color legend. More in general, looking at the four volumetric meshes nearby the left coronary leaflet shown in Figure 9, bottom, we notice the ability of our method in reproducing the presence of the valve using the resistive RIIS term and, as a consequence, without the necessity of meshing the valve surface; indeed, the movement of the leaflets does not modify the computational mesh, but it is totally described by the evolution of the two level set functions  $\varphi$  and  $\psi$  through our method.

With the aim of showing the evolution of the 3D vortex structures in the aorta, we show in Figure 10 the Q-criterion (Hunt et al, 1988) normalized for its maximum value at each time instances and the velocity streamlines. Concerning the early systole, the Q-criterion shows a ring detaching and then breaking away from the three leaflets (Figure 10, top); this highlights well organized laminar vortex structures in this phase of the cardiac cycle. It is interesting to note the asymmetry of the ring that evolves mainly in the two coronary sinuses rather than in the non-coronary one; indeed, since the aortic wall is almost attached to the non-coronary leaflet, the vortexes do not have sufficient space to develop in this sinus. The ring visualized by the Q-criterion in early systole is also discussed by Borazjani et al (2010), where the authors also underline that in an anatomic aorta the ring is asymmetric rather than symmetric as it would occur in an idealized aorta. At this stage of the cardiac cycle, the movement of the vortex from the right and left coronary sinuses to the ascending aorta is clearly visible also by looking at the streamlines (Figure 10, bottom-left and bottom-center). As reported in Charitos and Sievers (2013), these vortexes also help the leaflets not to attach to the aortic wall. During the central part of the systole, when the flow rate and the velocity magnitude reach their peak values, the vortex structures break down into smaller structures (Figure 10, center-left); a similar behavior is commented in (Borazjani et al, 2010). Looking at the streamlines (Figure 10, bottom-right) we notice how, in this phase, a disorganized recirculation appears at a bigger scale, localized in the region of the aorta opposite to the non-coronary sinus: this phenomenon contributes to the deviation of the blood jet to the wall, as noticeable in Figure 8 by observing the velocity magnitude. At the late systole, when the velocity decreases again, the size of vortex structures increases and their localization in the opposite region of the non-coronary sinus is more evident (Figure 10, center-center). Finally, the patterns assumed by the Q-criterion during the diastole are particularly interesting (Figure 10, center-right): a big cylindrical shape appears in the ascending aorta indicating an organized recirculation, while two helical patterns appear only in the two coronary sinuses indicating the presence of vortexes; as reported in Charitos and Sievers (2013), these vortexes are physiological and contribute to the closure of the leaflets and to the perfusion of the coronary arteries. We remark that the behavior captured by our AV-RIIS model could not have been observed using a simplified symmetrical geometry.

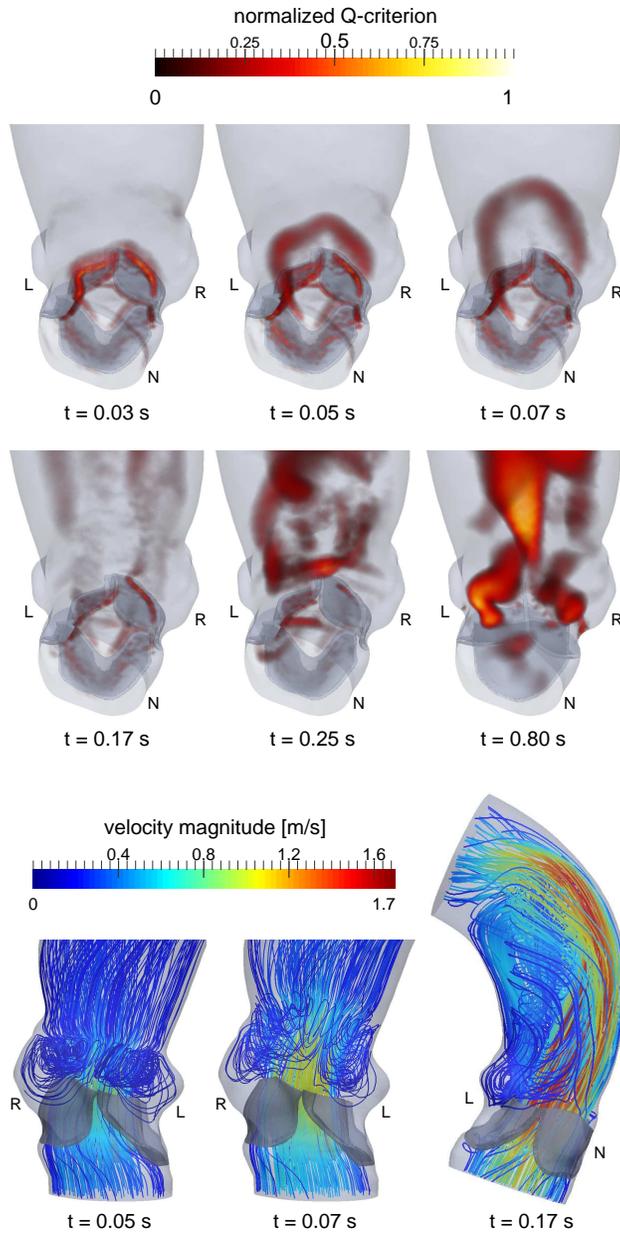


Figure 10: Vortex structures visualized by a volume rendering of the normalized Q-criterion at different instants of the cardiac cycle (top); on the bottom streamlines of the velocity: the evolution of the vortices in the right and left coronary sinuses during the early systole (left and center), and the systolic peak in the ascending aorta (right). The aorta and the leaflets are imaged in transparency and the left (L), the right (R) and the non-coronary (N) Valsalva sinuses are indicated.

## 6 Conclusions

In this paper, a full computational pipeline to simulate patient-specific hemodynamics in the aorta with patient-specific aortic valve is presented. The framework includes a segmentation method for the aorta and a reconstruction method able to obtain the closed and the open configurations of the patient-specific valve. The fluid dynamics problem with the movement of the valve is solved by a new reduced 3D-0D FSI model (AV-RIIS). The model is based on an analytical implicit representation of the valve leaflets through a level set formulation. The presence of the valve is then included in the momentum equation of the Navier-Stokes equations by adding a resistive term, which weakly enforces the blood to adhere to the leaflets (Fernández et al, 2008). The dynamics of the valve between its closed and open position is modeled using the reduced zero-dimensional model (AV-0D) proposed by Korakianitis and Shi (2006), and the coupling between the 3D and 0D models is performed through an original algorithm which allows to obtain realistic physiological results. At the discrete level, a FE formulation is used to spatially approximate the Navier-Stokes equations with an extended SUPG stabilization (Bazilevs et al, 2007; Forti and Dedè, 2015).

We applied our computational pipeline to the analysis of blood flow in a patient enrolled by Ospedale Sacco of Milano, Italy. The results showed that our method succeeded in the reconstruction of the patient-specific aortic valve leaflets in both open and closed positions: this is a very challenging and important aspect in numerical models for the aortic valve, since the geometrical configuration of the valve greatly influences the hemodynamics (Marom, 2015). Moreover, we highlighted the ability of our method to reproduce the motion of the orifice and of the leaflets position during the cardiac cycle. Concerning the pressure field inside the aorta, the results demonstrated that the method is capable to capture the sharp pressure jump across the valve without the necessity of meshing the valve leaflets. The recovered velocity field evidenced an asymmetric fluid pattern, which is strictly linked to patient-specific geometric asymmetries, captured thanks to our method.

In summary, we demonstrated the importance of counting on a framework which is capable of simulating blood flow through a patient-specific aortic valve; as a matter of fact, even more sophisticated approaches used with idealized leaflets, could hardly grasp the asymmetrical hemodynamics characterizing this patient. The variability among different patients can be captured only considering the patient-specific aortic geometry and the patient-specific leaflets in the correct position.

The analysis reported in this work is purely demonstrative of the ability of our method and we did not provide any clinical interpretation of the numerical results associated to the patient; however, since our reduced 3D-0D FSI model is conceived to work on patient-specific data, it can be used to understand the hemodynamics of the ascending aorta, as well to study aortic and valvular diseases.

## Acknowledgements

We gratefully acknowledge M.D. S. Ippolito and M.D. R. Scrofani (Cardiac Surgery Department of Ospedale Sacco, Milano, Italy) for the clinical data used in this paper and Dr. S. Deparis, Dr. D. Forti and Dr. A. Laadhari (CMCS, École Polytechnique Fédérale de Lausanne, Lausanne, Switzerland) for assistance and suggestions.

## References

- Astorino M, Gerbeau JF, Pantz O, Traoré KF (2009) Fluid–structure interaction and multi-body contact: application to aortic valves. *Computer Methods in Applied Mechanics and Engineering* 198(45):3603–3612
- Astorino M, Hamers J, Shadden SC, Gerbeau JF (2012) A robust and efficient valve model based on resistive immersed surfaces. *International Journal for Numerical Methods in Biomedical Engineering* 28(9):937–959
- Auricchio F, Conti M, Morganti S, Totaro P (2011) A computational tool to support pre-operative planning of stentless aortic valve implant. *Medical Engineering & Physics* 33(10):1183–1192
- Auricchio F, Conti M, Ferrara A, Morganti S, Reali A (2014) Patient-specific simulation of a stentless aortic valve implant: the impact of fibres on leaflet performance. *Computer Methods in Biomechanics and Biomedical Engineering* 17(3):277–285
- Avolio P (1980) Multi-branched model of the human arterial system. *Medical & biological Engineering & computing* 18(6):709–18
- Bazilevs Y, Calo V, Cottrell J, Hughes T, Reali A, Scovazzi G (2007) Variational multiscale residual-based turbulence modeling for large eddy simulation of incompressible flows. *Computer Methods in Applied Mechanics and Engineering* 197(1):173–201
- Bonomi D, Vergara C, Faggiano E, Stevanella M, Conti C, Redaelli A, Puppini G, Faggian G, Formaggia L, Luciani G (2015) Influence of the aortic valve leaflets on the fluid-dynamics in aorta in presence of a normally functioning bicuspid valve. *Biomechanics and Modeling in Mechanobiology* 14(6):1349–1361
- Borazjani I (2013) Fluid–structure interaction, immersed boundary-finite element method simulations of bio-prosthetic heart valves. *Computer Methods in Applied Mechanics and Engineering* 257:103–116

- Borazjani I, Ge L, Sotiropoulos F (2010) High-resolution fluid–structure interaction simulations of flow through a bi-leaflet mechanical heart valve in an anatomic aorta. *Annals of Biomedical Engineering* 38(2):326–344
- Caballero A, Laín S (2013) A review on computational fluid dynamics modelling in human thoracic aorta. *Cardiovascular Engineering and Technology* 4(2):103–130
- Chandra S, Rajamannan NM, Sucusky P (2012) Computational assessment of bicuspid aortic valve wall-shear stress: implications for calcific aortic valve disease. *Biomechanics and Modeling in Mechanobiology* 11(7):1085–1096
- Chandran KB, Vigmostad SC (2013) Patient-specific bicuspid valve dynamics: overview of methods and challenges. *Journal of Biomechanics* 46(2):208–216
- Charitos EI, Sievers HH (2013) Anatomy of the aortic root: implications for valve-sparing surgery. *Annals of Cardiothoracic Surgery* 2(1):53
- Cheng R, Lai YG, Chandran KB (2004) Three-dimensional fluid-structure interaction simulation of bileaflet mechanical heart valve flow dynamics. *Annals of Biomedical Engineering* 32(11):1471–1483
- Conti CA, Della Corte A, Votta E, Del Viscovo L, Bancone C, De Santo LS, Redaelli A (2010a) Biomechanical implications of the congenital bicuspid aortic valve: a finite element study of aortic root function from in vivo data. *The Journal of Thoracic and Cardiovascular Surgery* 140(4):890–896
- Conti CA, Votta E, Della Corte A, Del Viscovo L, Bancone C, Cotrufo M, Redaelli A (2010b) Dynamic finite element analysis of the aortic root from mri-derived parameters. *Medical Engineering & Physics* 32(2):212–221
- Crosetto P, Deparis S, Fourestey G, Quarteroni A (2011) Parallel algorithms for fluid-structure interaction problems in haemodynamics. *SIAM Journal on Scientific Computing* 33(4):1598–1622
- De Hart J, Baaijens F, Peters G, Schreurs P (2003a) A computational fluid-structure interaction analysis of a fiber-reinforced stentless aortic valve. *Journal of Biomechanics* 36(5):699–712
- De Hart J, Peters G, Schreurs P, Baaijens F (2003b) A three-dimensional computational analysis of fluid–structure interaction in the aortic valve. *Journal of Biomechanics* 36(1):103–112
- De Hart J, Peters G, Schreurs P, Baaijens F (2004) Collagen fibers reduce stresses and stabilize motion of aortic valve leaflets during systole. *Journal of Biomechanics* 37(3):303–311

- Della Corte A, Bancone C, Conti CA, Votta E, Redaelli A, Del Viscovo L, Cotrufo M (2012) Restricted cusp motion in right-left type of bicuspid aortic valves: a new risk marker for aortopathy. *The Journal of Thoracic and Cardiovascular Surgery* 144(2):360–369
- Deparis S, Forti D, Grandperrin G, Quarteroni A (2015) Facsi: A block parallel preconditioner for fluid-structure interaction in hemodynamics. Tech. Rep. 13.2015, MATHICSE - SB, École Polytechnique Fédérale de Lausanne, Lausanne, Switzerland
- Faggiano E, Antiga L, Puppini G, Quarteroni A, Luciani GB, Vergara C (2013a) Helical flows and asymmetry of blood jet in dilated ascending aorta with normally functioning bicuspid valve. *Biomechanics and Modeling in Mechanobiology* 12(4):801–813
- Faggiano E, Formaggia L, Antiga L (2013b) An open-source tool for patient-specific fluid-structure vessel mesh generation. In: *Modelling of Physiological Flows (MPF), 2013 V International Symposium on*, pp 25–26
- Fedele M, Faggiano E, Barbarotta L, Cremonesi F, Formaggia L, Perotto S (2015) Semi-automatic three-dimensional vessel segmentation using a connected component localization of the region-scalable fitting energy. In: *Image and Signal Processing and Analysis (ISPA), 2015 9th International Symposium on*, IEEE, pp 72–77
- Fernández MA, Gerbeau JF, Martin V (2008) Numerical simulation of blood flows through a porous interface. *ESAIM: Mathematical Modelling and Numerical Analysis* 42(06):961–990
- Formaggia L, Quarteroni A, Veneziani A (2010) *Cardiovascular Mathematics: Modeling and simulation of the circulatory system*, vol 1. Springer Science & Business Media
- Forti D, Dedè L (2015) Semi-implicit bdf time discretization of the navier-stokes equations with vms-les modeling in a high performance computing framework. *Computers & Fluids* 117:168–182
- Gauthier A, Saleri F, Veneziani A (2004) A fast preconditioner for the incompressible navier stokes equations. *Computing and Visualization in Science* 6(2-3):105–112
- Ge L, Sotiropoulos F (2007) A numerical method for solving the 3d unsteady incompressible navier-stokes equations in curvilinear domains with complex immersed boundaries. *Journal of Computational Physics* 225(2):1782–1809
- Ge L, Sotiropoulos F (2010) Direction and magnitude of blood flow shear stresses on the leaflets of aortic valves: is there a link with valve calcification? *Journal of Biomechanical Engineering* 132(1):014,505

- Griffith BE (2012) Immersed boundary model of aortic heart valve dynamics with physiological driving and loading conditions. *International Journal for Numerical Methods in Biomedical Engineering* 28(3):317–345
- Handke M, Heinrichs G, Beyersdorf F, Olschewski M, Bode C, Geibel A (2003) In vivo analysis of aortic valve dynamics by transesophageal 3-dimensional echocardiography with high temporal resolution. *The Journal of thoracic and Cardiovascular Surgery* 125(6):1412–1419
- Hsu MC, Kamensky D, Bazilevs Y, Sacks MS, Hughes TJ (2014) Fluid–structure interaction analysis of bioprosthetic heart valves: significance of arterial wall deformation. *Computational Mechanics* 54(4):1055–1071
- Hunt JC, Wray A, Moin P (1988) Eddies, streams, and convergence zones in turbulent flows. Center for Turbulence Research Report CTR-S88 pp 193–208
- Kamensky D, Hsu MC, Schillinger D, Evans JA, Aggarwal A, Bazilevs Y, Sacks MS, Hughes TJ (2015) An immersogeometric variational framework for fluid–structure interaction: Application to bioprosthetic heart valves. *Computer Methods in Applied Mechanics and Engineering* 284:1005–1053
- Korakianitis T, Shi Y (2006) A concentrated parameter model for the human cardiovascular system including heart valve dynamics and atrioventricular interaction. *Medical Engineering & Physics* 28(7):613–628
- Laadhari A, Quarteroni A (2016) Numerical modeling of heart valves using resistive eulerian surfaces. *International Journal for Numerical Methods in Biomedical Engineering* 32(5)
- Le TB, Sotiropoulos F (2013) Fluid–structure interaction of an aortic heart valve prosthesis driven by an animated anatomic left ventricle. *Journal of Computational Physics* 244:41–62
- Leyh RG, Schmidtke C, Sievers HH, Yacoub MH (1999) Opening and closing characteristics of the aortic valve after different types of valve-preserving surgery. *Circulation* 100(21):2153–2160
- van Loon R, Anderson PD, van de Vosse FN (2006) A fluid–structure interaction method with solid-rigid contact for heart valve dynamics. *Journal of Computational Physics* 217(2):806–823
- Marom G (2015) Numerical methods for fluid–structure interaction models of aortic valves. *Archives of Computational Methods in Engineering* 22(4):595–620
- Marom G, Haj-Ali R, Raanani E, Schäfers HJ, Rosenfeld M (2012) A fluid–structure interaction model of the aortic valve with coaptation and compliant aortic root. *Medical & Biological Engineering & Computing* 50(2):173–182

- Marom G, Kim HS, Rosenfeld M, Raanani E, Haj-Ali R (2013) Fully coupled fluid–structure interaction model of congenital bicuspid aortic valves: effect of asymmetry on hemodynamics. *Medical & Biological Engineering & Computing* 51(8):839–848
- McQueen D, Peskin C (2000) A three-dimensional computer model of the human heart for studying cardiac fluid dynamics. *ACM SIGGRAPH Computer Graphics* 34(1):56–60
- Morganti S, Conti M, Aiello M, Valentini A, Mazzola A, Reali A, Auricchio F (2014) Simulation of transcatheter aortic valve implantation through patient-specific finite element analysis: two clinical cases. *Journal of Biomechanics* 47(11):2547–2555
- Morsi YS, Yang WW, Wong CS, Das S (2007) Transient fluid–structure coupling for simulation of a trileaflet heart valve using weak coupling. *Journal of Artificial Organs* 10(2):96–103
- Nestola MGC, Faggiano E, Vergara C, Lancellotti RM, Ippolito S, Filippi S, Quarteroni A, Scrofani R (2016) Computational comparison of aortic root stresses in presence of stentless and stented aortic valve bio-prostheses. *Computer Methods in Biomechanics and Biomedical Engineering* submitted
- Osher S, Fedkiw RP (2001) Level set methods: an overview and some recent results. *Journal of Computational Physics* 169(2):463–502
- Pasta S, Rinaudo A, Luca A, Pilato M, Scardulla C, Gleason TG, Vorp DA (2013) Difference in hemodynamic and wall stress of ascending thoracic aortic aneurysms with bicuspid and tricuspid aortic valve. *Journal of Biomechanics* 46(10):1729–1738
- Peskin CS (1972) Flow patterns around heart valves: a numerical method. *Journal of Computational Physics* 10(2):252–271
- Peskin CS (2002) The immersed boundary method. *Acta numerica* 11:479–517
- Quarteroni A (2014) *Numerical Models for Differential Problems*, vol 8. Springer Science & Business
- Quarteroni A (2015) *Modeling the Heart and the Circulatory System*, vol 14. Springer
- Quarteroni A, Sacco R, Saleri F (2010) *Numerical Mathematics*, vol 37. Springer Science & Business Media
- Ranga A, Bouchot O, Mongrain R, Ugolini P, Cartier R (2006) Computational simulations of the aortic valve validated by imaging data: evaluation of valve-sparing techniques. *Interactive Cardiovascular and Thoracic Surgery* 5(4):373–378

- Rinaudo A, Pasta S (2014) Regional variation of wall shear stress in ascending thoracic aortic aneurysms. *Proceedings of the Institution of Mechanical Engineers, Part H: Journal of Engineering in Medicine* 228(6):627–638
- Sturla F, Votta E, Stevanella M, Conti CA, Redaelli A (2013) Impact of modeling fluid–structure interaction in the computational analysis of aortic root biomechanics. *Medical Engineering & Physics* 35(12):1721–1730
- Taylor CA, Steinman DA (2010) Image-based modeling of blood flow and vessel wall dynamics: applications, methods and future directions. *Annals of Biomedical Engineering* 38(3):1188–1203
- Tricerri P, Dedè L, Deparis S, Quarteroni A, Robertson AM, Sequeira A (2015) Fluid-structure interaction simulations of cerebral arteries modeled by isotropic and anisotropic constitutive laws. *Computational Mechanics* 55(3):479–498
- Tse KM, Chiu P, Lee HP, Ho P (2011) Investigation of hemodynamics in the development of dissecting aneurysm within patient-specific dissecting aneurismal aortas using computational fluid dynamics (cfd) simulations. *Journal of Biomechanics* 44(5):827–836
- Van Steenhoven A, Verlaan C, Veenstra P, Reneman R (1981) In vivo cinematographic analysis of behavior of the aortic valve. *American Journal of Physiology-Heart and Circulatory Physiology* 240(2):H286–H292
- Vergara C, Viscardi F, Antiga L, Luciani GB (2012) Influence of bicuspid valve geometry on ascending aortic fluid dynamics: a parametric study. *Artificial Organs* 36(4):368–378
- Wendell DC, Samyn MM, Cava JR, Ellwein LM, Krolikowski MM, Gandy KL, Pelech AN, Shadden SC, LaDisa JF (2013) Including aortic valve morphology in computational fluid dynamics simulations: initial findings and application to aortic coarctation. *Medical Engineering & Physics* 35(6):723–735
- Yang Y, Li C, Kao CY, Osher S (2010) Split bregman method for minimization of region-scalable fitting energy for image segmentation. In: *Advances in Visual Computing*, Springer, pp 117–128

## MOX Technical Reports, last issues

Dipartimento di Matematica  
Politecnico di Milano, Via Bonardi 9 - 20133 Milano (Italy)

- 22/2016** Antonietti, P.F.; Facciola', C.; Russo, A.; Verani, M.  
*Discontinuous Galerkin approximation of flows in fractured porous media*
- 21/2016** Ambrosi, D.; Zanzottera, A.  
*Mechanics and polarity in cell motility*
- 19/2016** Guerciotti, B.; Vergara, C.  
*Computational comparison between Newtonian and non-Newtonian blood rheologies in stenotic vessels*
- 20/2016** Wilhelm, M.; Sangalli, L.M.  
*Generalized Spatial Regression with Differential Regularization*
- Guerciotti, B.; Vergara, C.  
*Computational comparison between Newtonian and non-Newtonian blood rheologies in stenotic vessels*
- 18/2016** Ferroni, A.; Antonietti, P.F.; Mazzieri, I.; Quarteroni, A.  
*Dispersion-dissipation analysis of 3D continuous and discontinuous spectral element methods for the elastodynamics equation*
- 17/2016** Penati, M.; Miglio, E.  
*A new mixed method for the Stokes equations based on stress-velocity-vorticity formulation*
- 16/2016** Agosti, A.; Antonietti, P.F.; Ciarletta, P.; Grasselli, M.; Verani, M.  
*A Cahn-Hilliard type equation with degenerate mobility and single-well potential. Part I: convergence analysis of a continuous Galerkin finite element discretization.*
- 15/2016** Ieva, F.; Paganoni, A.M.  
*A taxonomy of outlier detection methods for robust classification in multivariate functional data*
- 14/2016** Bonomi, D.; Manzoni, A.; Quarteroni, A.  
*A matrix discrete empirical interpolation method for the efficient model reduction of parametrized nonlinear PDEs: application to nonlinear elasticity problems*